



# QCan


Surface Tri-Colour Downlight  
120mm & 160mm Diameter

## Technical

• Input Voltage	AC 200-240V
• Reflector Type	Faceted
• Beam Spread	60°
• CRI	>80
• Power Factor	>0.9
• Lamp Type	COB
• Operating Temp.	-20 to +40°C
• Materials	Die-cast
• IP Rating	IP54
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	287Lm (Applies to 160mm Only)



New Tri-Colour Cob



Please See Below For Suspension Fittings (Flex Length Made To Order)

## QCan Features

- IP54 Ingress Protection
- Tri-Colour LED COB
- Faceted Reflector
- Die-Cast Housing

### QCan Black Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
QCAN-10-120TC/BK	120mm	10W	115Lm/cW	1150Lm	Tri-Colour: 3000K, 4000K & 5000K
QCAN-15-120TC/BK	120mm	15W	115Lm/cW	1725Lm	
QCAN-20-120TC/BK	120mm	20W	115Lm/cW	2300Lm	
QCAN-20-160TC/BK	160mm	20W	115Lm/cW	2300Lm	
QCAN-25-160TC/BK	160mm	25W	115Lm/cW	2875Lm	
QCAN-30-160TC/BK	160mm	30W	115Lm/cW	3450Lm	

### QCan White Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
QCAN-10-120TC/WH	120mm	10W	115Lm/cW	1150Lm	Tri-Colour: 3000K, 4000K & 5000K
QCAN-15-120TC/WH	120mm	15W	115Lm/cW	1725Lm	
QCAN-20-120TC/WH	120mm	20W	115Lm/cW	2300Lm	
QCAN-20-160TC/WH	160mm	20W	115Lm/cW	2300Lm	
QCAN-25-160TC/WH	160mm	25W	115Lm/cW	2875Lm	
QCAN-30-160TC/WH	160mm	30W	115Lm/cW	3450Lm	

Net Weight	Diameter	Height (B)
0.52kg	120mm	110mm
1.23kg	160mm	120mm

Option	Option Code
3 Hour Emergency (160mm Models Only)	+ /EM
Dimming Options (160mm Models Only)	See Below - Contact Office



**SILVAIR CASAMBI**

## Accessories

### Suspension Fittings

#### Black Fitting

Part Code: QCAN-120-SB/BK  
Part Code: QCAN-160-SB/BK




#### White Fitting


Part Code: QCAN-120-SB/WH  
Part Code: QCAN-160-SB/WH



## Dimensions

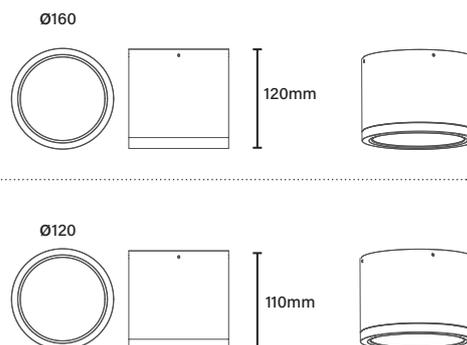

## Photometric Data



## Energy Efficiency Rating

