



Pileus

Post-Top Luminaire

Technical

• Input Voltage	AC 100-240V
• Beam Spread	120°
• CRI	>70Ra
• Operating Temp	-40°C to -50°C
• Materials	Die-Cast Aluminium
• IP Rating	IP66
• IK Rating	IK10
• Surge Protection	10Kv
• Spigot Size	60mm or 76mm
• Dimmable	On Request
• Lifetime	100,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	N/A



Pileus Features

- IP66 Ingress Protection
- 10Kv Surge Protection
- Wattage & Colour Switchable
- Tri-Colour
(2700K/3000K/4000K)
- 5m Cable Flex
- 60/76mm Spigot

Pileus - Standard Options

Part Code	Power	Windage	Efficacy	Output	Kelvin
PIL-WS-450TC	30W	0.176m2	140Lm/cW	4200Lm	Tri-Colour: 2700K, 3000K & 4000K
	40W	0.176m2	140Lm/cW	5600Lm	
	60W	0.176m2	140Lm/cW	8400Lm	

Net Weight | 8kg


Pileus - Photocell Options

Part Code	Power	Windage	Efficacy	Output	Kelvin
PIL-WS-450TC/PH	30W	0.176m2	140Lm/cW	4200Lm	Tri-Colour: 2700K, 3000K & 4000K
	40W	0.176m2	140Lm/cW	5600Lm	
	60W	0.176m2	140Lm/cW	8400Lm	


Net Weight | 8kg

Options	Option Code
DALI 2.0 Dimmable	+/D
Bespoke Columns	Quoted to suit

Dimensions

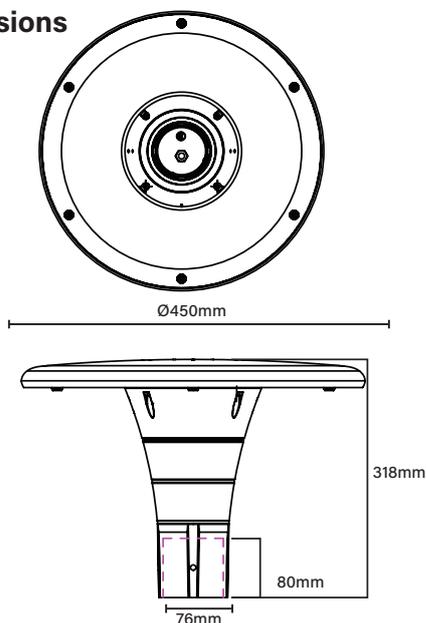

Photometric Data



Energy Efficiency Rating

