



QGlobe

Post-Top Luminaire

Technical

• Input Voltage	AC 220-240V
• CRI	>70
• Power Factor	>0.9
• Operating Temp	-25 to +50°C
• Materials	Die-Cast Aluminium
• IP Rating	IP66
• Surge Protection	10Kv
• Spigot Size	60mm or 76mm
• Dimmable	On Request
• Lifetime	100,000 hours, L90-B10 (Ta 40 °C)
• Emergency Output	N/A



QGlobe Features

- IP66 Ingress Protection
- 10Kv Surge Protection
- 5m Cable Flex
- 60/76mm Spigot

QGlobe

Part Code	Power	Windage	Efficacy	Output	Kelvin
QGLOBE-WS-500-2CCT	30W	0.21m ²	108Lm/cW	3240Lm	3000K & 4000K
	45W	0.21m ²	108Lm/cW	4860Lm	
	60W	0.21m ²	108Lm/cW	6480Lm	

Net Weight | 5.4kg

Options	Option Code
DALI 2.0 Dimmable	+/D
Bespoke Columns	Quoted to suit




Accessories




Optional Add on
Built-In Photocell Sensor

Part Code: QGLOBE-PH-BRACKET

Dimensions

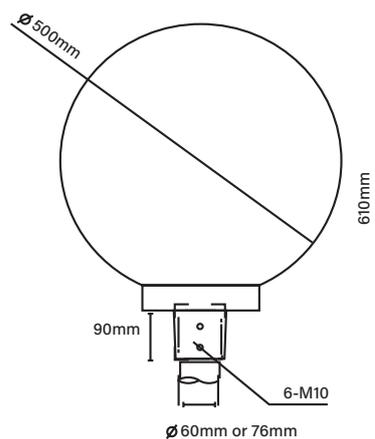

Photometric Data



Energy Efficiency Rating

