7 YEARS* WARRANTY

QPath2
Bollard Luminaire



Technical

▪ Input Voltage	AC 120-277V
▪ CRI	>80
▪ Power Factor	>0.9
▪ Operating Temp	-40 to +45°C
▪ Materials	Die-Cast Aluminium
▪ IP Rating	IP65
▪ IK Rating	IK08
▪ Surge Protection	2Kv
▪ Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
▪ Emergency Output	325Lm (Cone) / 150Lm (Louvre)

Features

IP65 Ingress Protection | **2Kv Surge Protection** | **Wattage Switchable** | **Tri-Colour** (3000K/3500K/4000K) | **Photocell Included (Can be disabled)**

Part Code	Description
QP2-100-BASE	885mm Die-Cast Bollard Base (Includes concrete root mount kit & cable bracket)

Part Code | Bollard Heads	Power	Efficacy	Output	Kelvin
QP2-CONE-WS-DC/FL (Flat Head, Cone Reflector) **QP2-CONE-WS-DC/DO** (Domed Head, Cone Reflector)	14W	140Lm/cW	1,960Lm	**Tri-Colour:** 3000K, 3500K & 4000K
	19W		2,660Lm	
	24W		3,360Lm	
QP2-LOU-WS-DC/FL (Flat Head, Louvre Reflector) **QP2-LOU-WS-DC/DO** (Domed Head, Louvre Reflector)	14W	75Lm/cW	1,050Lm	**Tri-Colour:** 3000K, 3500K & 4000K
	19W		1,425Lm	
	24W		1,800Lm	
QP2-DS-WS (Flat Head)	14W	125Lm/cW	1,750Lm	**Tri-Colour:** 2700K, 3000K & 4000K
	19W		2,375Lm	
	24W		3,000Lm	

Options	Option Code
3 Hour Emergency	+/EM

Net Weight	Flat
5.35kg	Flat (Cone Optic) + Base
5.75kg	Flat (Louvre Optic) + Base
5.4kg	Dome (Cone Optic) + Base
5.8kg	Dome (Louvre Optic) + Base
4.83kg	Flat (All Black Cone Optic) + Base

Accessories Included



Concrete Root Mount Kit & Cable Bracket

Optional Accessories



Part Code: QP2-ROOT
Soft-Ground Root Mounting Kit



Part Code: QP2-SHEILD
Spill Shield For Rear Mounting To Bollard Head (180°)

Dimensions

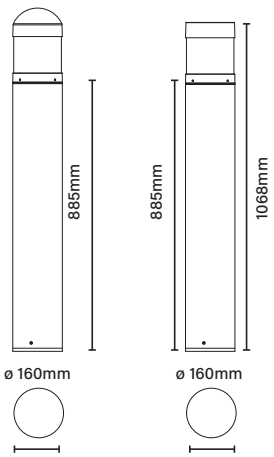

Photometric Data



Cone Reflector



Louvre Reflector

Energy Efficiency Rating

