




Rebel

Retro-Fit Gear Tray

Square/Round

Technical

• Input Voltage	AC 200-240V
• CRI	>80
• Operating Temp.	-20 to +40°C
• Beam Angle	120°C
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Power Factor	>0.8
• Emergency Output	262Lm



Rebel Retro-Fit Gear Tray Features



Microwave Sensor



Emergency Option



Wattage Switchable



Tri-Colour
(3000K/4000K/6000K)

Rebel Retro-Fit Gear Tray

Part Code	Power	Efficacy	Output	Kelvin
RBL-GT-SQ-WS-255TC (Square Model)	9W	140Lm/cW	1260Lm	Tri-Colour: 3000K, 4000K & 6000K
	12W	140Lm/cW	1680Lm	
	15W	140Lm/cW	2100Lm	
	18W	140Lm/cW	2520Lm	
RBL-GT-RD-WS-285TC (Round Model)	9W	140Lm/cW	1260Lm	Tri-Colour: 3000K, 4000K & 6000K
	12W	140Lm/cW	1680Lm	
	15W	140Lm/cW	2100Lm	
	18W	140Lm/cW	2520Lm	


Net Weight

Square GT	190kg
Circular GT	190kg

Options

Options	Option Code
3 Hour Emergency	+/EM
Microwave Sensor	+/M
Emergency & Microwave	+/M/EM

Dimensions

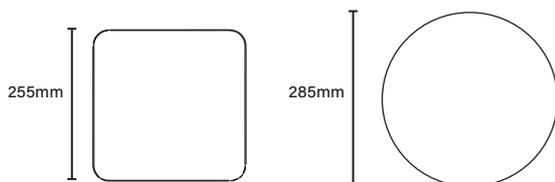

Photometric Data

