



# Rebel

## Canopy Bulkhead

### Technical

• Input Voltage	AC 220-240V
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to +40°C
• Materials	Polycarbonate
• IP Rating	IP65
• IK Rating	IK10
• Dimmable	On Request
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	262Lm



### Rebel Canopy Bulkhead Features



IP65 Ingress Protection



Conduit Side & Back Entry



Wattage Switchable



Tri-Colour  
(3000K/4000K/6000K)

### Rebel Canopy Bulkhead

Part Code	Power	Efficacy	Output	Kelvin
RBL-SWS-255TC (Square Model)	9W	105Lm/cW	945Lm	Tri-Colour: 3000K, 4000K & 6000K
	12W	105Lm/cW	1260Lm	
	15W	105Lm/cW	1575Lm	
	18W	105Lm/cW	1890Lm	
RBL-RWS-285TC (Circular Model)	9W	105Lm/cW	945Lm	Tri-Colour: 3000K, 4000K & 6000K
	12W	105Lm/cW	1260Lm	
	15W	105Lm/cW	1575Lm	
	18W	105Lm/cW	1890Lm	

### Net Weight

Square Bulkhead	0.84kg
Circular Bulkhead	0.78kg

Options	Option Code
3 Hour Emergency	+/EM
Microwave Sensor	+/M
Emergency & Microwave	+/M/EM
DALI 2.0 Dimmable	On Request



### Accessories




#### Black Bases Available

**Part Code: REBEL-SQ-BLK-BASE**  
Black Base For Square Rebel Fitting


**Part Code: REBEL-RD-BLK-BASE**  
Black Base For Circular Rebel Fitting

**Part Code: RBL-TAMPERSCREWS**  
Pack Of 4x Vandal Tamper-Proof  
Screws (Anti Flex Key Included)

### Dimensions

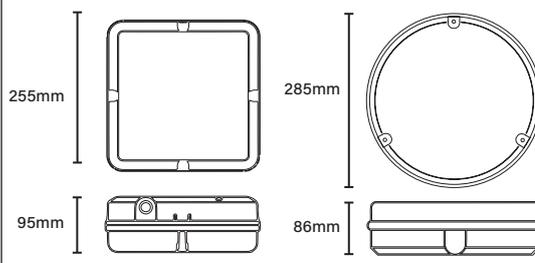

### Photometric Data



# Rebel 2

New Housing  
Coming soon

