





QRack Light

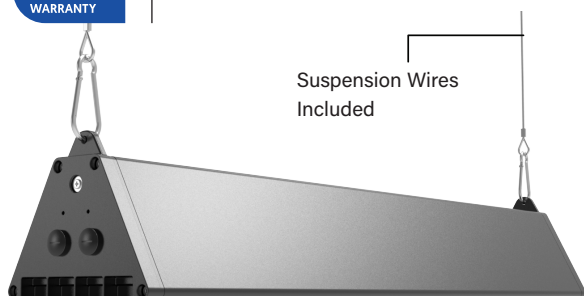

Suspension Wires
Included

Technical

• Input Voltage	AC 120-277V
• Beam Spread	30°x70°
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20°C to +45°C
• Materials	Polycarbonate & Aluminium
• IP Rating	IP65
• IK Rating	IK08
• Lifetime	50,000 hours, L80-B20 (Ta 25 °C)



CCT Selectable

Power Selectable

QRack Light Features



IP65 Ingress
Protection



IK08 Impact
Resistance



Wattage
Switchable



Asymmetric Beam



Tri-Colour
3000K/4000K/5000K

QRack Light - Tri-Colour & Wattage Switchable

Part Code	Size	Power	Efficacy	Output	Kelvin
QRACK-WS200TC/AS	1097x140x120mm	100W	170Lm/cW	17000Lm	Tri-Colour: 3000K, 4000K & 5000K
		150W	170Lm/cW	25500Lm	
		200W	170Lm/cW	34000Lm	
QRACK-WS300TC/AS	1448x140x120mm	200W	170Lm/cW	34000Lm	Tri-Colour: 3000K, 4000K & 5000K
		250W	170Lm/cW	42500Lm	
		300W	170Lm/cW	51000Lm	





Option

3 Hour Emergency


Option Code

+ /EM


Dimensions

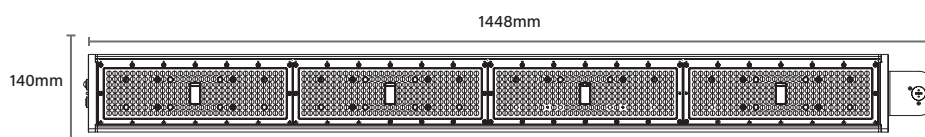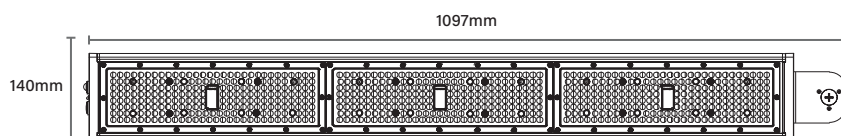

Photometric Data



Energy Efficiency Rating



Accessories - Plug & Play Sensors & Emergency Kit

Part Code	Description
GU-BOLT-MICRO-3PIN	Microwave Sensor



Part Code	Description
GU-BOLT-PIR-3PIN	PIR Sensor



Part Code	Description
SILVAIR-MESH-HB-SENSOR-3P	Bluetooth Sensor



Part Code	Description
QRACK-SUR-BRACKET	Surface Bracket For QRack (2 pieces per set)

