




QSite

Temporary Lighting Vapour Proof

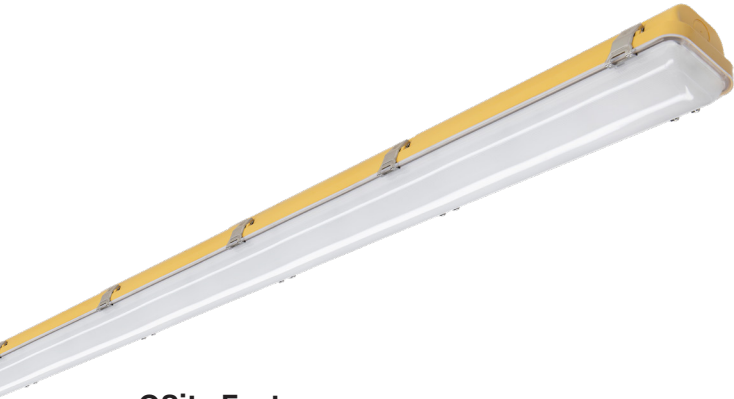

Technical

• Input Voltage	AC 100-277V
• Beam Spread	120°
• CRI	>70
• Power Factor	>0.9
• Operating Temp.	-20 to +45°C
• Materials	Polycarbonate
• IP Rating	IP66
• IK Rating	IK08
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	275Lm

QSite Features

- IP65 Ingress Protection
- IK10 Impact Resistance
- Polycarbonate Housing
- 110V Compatible

QSite


Part Code	Size	Power	Efficacy	Output	Kelvin
QSITE-NCF-20-600NW	600mm (2ft.)	25W	110Lm/cW	2750Lm	4000K
QSITE-NCF-50-1500NW	1500mm (5ft.)	50W	110Lm/cW	5500Lm	4000K

Net Weight	Length (A)
0.9kg	600mm
1.9kg	1500mm

Options	Option Code
3 Hour Emergency	+EM



Dimensions

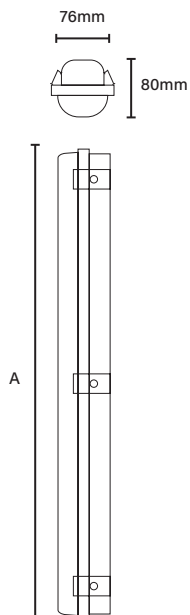

Photometric Data

