




# QSite

Temporary Lighting Vapour Proof

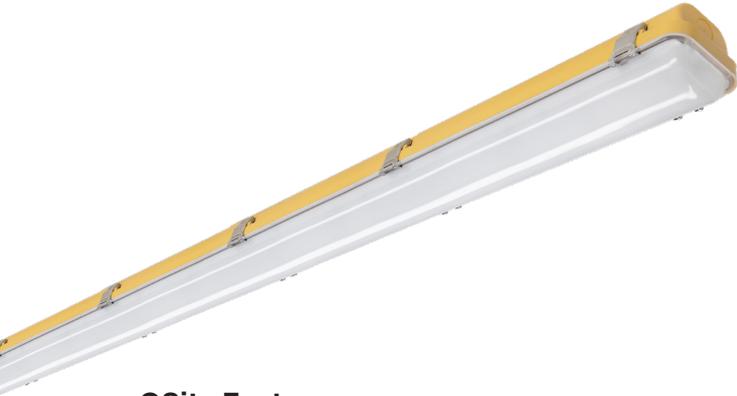

### Technical

• Input Voltage	AC 100-277V
• Beam Spread	120°
• CRI	>70
• Power Factor	>0.9
• Operating Temp.	-20 to +45°C
• Materials	Polycarbonate
• IP Rating	IP66
• IK Rating	IK08
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	275Lm

### QSite Features



IP65 Ingress Protection



IK10 Impact Resistance



Polycarbonate Housing



110V Compatible

### QSite

Part Code	Size	Power	Efficacy	Output	Kelvin
QSITE-NCF-20-600NW	600mm (2ft.)	25W	110Lm/cW	2750Lm	4000K
QSITE-NCF-50-1500NW	1500mm (5ft.)	50W	110Lm/cW	5500Lm	4000K

### Net Weight | Length (A)


0.9kg	600mm
1.9kg	1500mm

### Options | Option Code

3 Hour Emergency	+ /EM
------------------	-------



### Dimensions

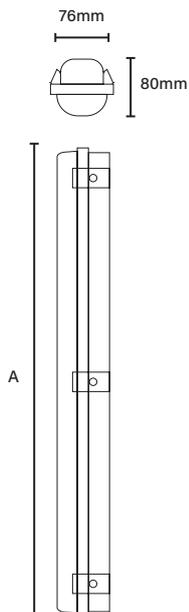

### Photometric Data

