



QStorm Pro

Switchable Vapour Proof



Twin Housing

Technical

• Input Voltage	AC 200-240V
• Beam Spread	120°
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to +40°C
• Materials	Polycarbonate
• IP Rating	IP66
• IK Rating	IK08
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	425Lm

QStorm Pro Features



QStorm Pro

Part Code	Power	Efficacy	Output	Kelvin
QS-PRO-WS-600TC	11W	170Lm/cW	1870Lm	Tri-Colour: 3000K, 4000K & 5700K
	14W	170Lm/cW	2380Lm	
	16W	170Lm/cW	2720Lm	
	19W	170Lm/cW	3230Lm	
QS-PRO-WS-1200TC	17W	170Lm/cW	2890Lm	Tri-Colour: 3000K, 4000K & 5700K
	21W	170Lm/cW	3570Lm	
	26W	170Lm/cW	4420Lm	
	30W	170Lm/cW	5100Lm	
QS-PRO-WS-1500TC	26W	170Lm/cW	4420Lm	Tri-Colour: 3000K, 4000K & 5700K
	32W	170Lm/cW	5440Lm	
	39W	170Lm/cW	6630Lm	
	45W	170Lm/cW	7650Lm	
QS-PRO-WS-1800TC	37W	170Lm/cW	6290Lm	Tri-Colour: 3000K, 4000K & 5700K
	46W	170Lm/cW	7820Lm	
	56W	170Lm/cW	9520Lm	
	65W	170Lm/cW	11050Lm	


Net Weight	(A x B)	ft.
1kg	633mm x 120mm	2ft.
1.97kg	1223mm x 120mm	4ft.
2.33kg	1523mm x 120mm	5ft.
2.68kg	1823mm x 120mm	6ft.

Sensor, Emergency & Dimming Options	Option Code
3 Hour Emergency	+ /EM
Step-Dim Microwave Sensor	+ /MS
Emergency & Microwave	+ /MS/EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

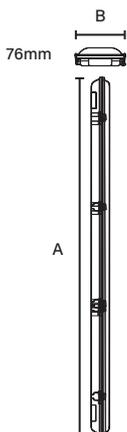

Photometric Data

