



# Aqua MOD

Low Glare IP65 Back-Lit Panel - 4000K  
595mmx595mm



## Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<17
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP65
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	387Lm

## Features



IP65 Ingress Protection  
(Front & Back)



TP(a)  
Fire Rating



Wattage  
Switchable



Microprismatic Diffuser  
Low Glare

Part Code	Power	Efficacy	Output	Kelvin
AQUAMOD-WS-6X6NW	14W	140Lm/cW	1960Lm	4000K
	16W		2240Lm	
	18W		2520Lm	
	21W		2940Lm	
	23W		3220Lm	
	25W		3500Lm	
	27W		3780Lm	
	29W		4060Lm	


Net Weight | 2.6kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

## Dimensions

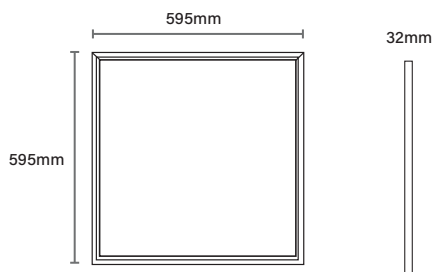

## Photometric Data

