




ArcMOD

Side-Lit Panel
595mmx595mm

Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	110°
• CRI	>80
• Power Factor	>0.95
• Typical UGR	<19
• Operating Temp.	-25 to +40°C
• Materials	Aluminium
• IP Rating	IP20
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	362Lm

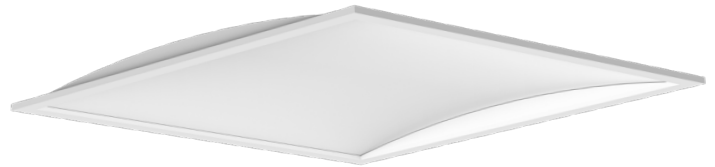

Features



Low Glare
Diffuser



TP(a)
Fire Rating



Polycarbonate
Housing

Part Code	Power	Efficacy	Output	Kelvin
ARCMOD-WS-6X6NW	14W	120Lm/cW	1,680Lm	4000K
	16W		1,920Lm	
	18W		2,160Lm	
	21W		2,520Lm	
	23W		3,450Lm	
	25W		3,000Lm	
	27W		3,240Lm	
	29W		3,480Lm	


Net Weight | 3kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

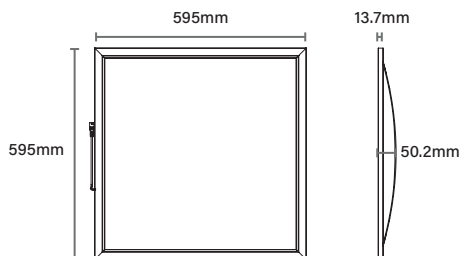

Photometric Data

