



Lynx LG

Low Glare Edge-Lit Panel - 4000K
1197mmx 597mm



Technical

| | |
|--------------------|----------------------------------|
| • Input Voltage | AC 220-240V |
| • Diffuser Type | Microprismatic |
| • Beam Spread | 90° |
| • CRI | >85 |
| • Power Factor | >0.95 |
| • Typical UGR | <17 |
| • Operating Temp. | -20 to +50°C |
| • Materials | Aluminium |
| • IP Rating | IP44 |
| • Fire Rating | TP(a) |
| • Dimmable | On Request |
| • Lifetime | 50,000 hours, L90-B10 (Ta 25 °C) |
| • Emergency Output | 350Lm |

Lynx LG Features

- IP44 Ingress Protection
- TP(a) Fire Rating
- Wattage Switchable
- Microprismatic Diffuser Low Glare
- First Fix Connector

| Lynx LG | | | | |
|--------------------|-------|----------|--------|--------|
| Part Code | Power | Efficacy | Output | Kelvin |
| LYNX-LG3-WS-12X6NW | 33W | 140Lm/cW | 4620Lm | 4000K |
| | 38W | 140Lm/cW | 5320Lm | |
| | 41W | 140Lm/cW | 5740Lm | |
| | 44W | 140Lm/cW | 6160Lm | |
| | 47W | 140Lm/cW | 6580Lm | |
| | 50W | 140Lm/cW | 7000Lm | |
| | 53W | 140Lm/cW | 7420Lm | |
| | 56W | 140Lm/cW | 7840Lm | |


Net Weight | 8.5kg

| Option | Option Code |
|------------------|----------------------------|
| 3 Hour Emergency | +/EM |
| Dimming Options | See Below - Contact Office |




SILVAIR CASAMBI

Dimensions

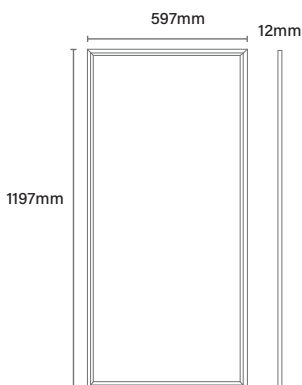

Photometric Data



Energy Efficiency Rating

