

SPECIFICATION



Phoenix

Architectural Panel - Tri-Colour
595mmx595mm

Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Opal
• Beam Spread	78°
• CRI	>90
• Power Factor	>0.9
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Polycarbonate
• IP Rating	IP40
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	275Lm



Phoenix Features



Low Glare
Diffuser



TP(a)
Fire Rating



Architectural
Design



Polycarbonate
Housing

Phoenix

Part Code	Power	Efficacy	Output	Kelvin
PHO-WS-6X6TC	15W	130Lm/cW	1950Lm	Tri-Colour: 3000K, 4000K & 6000K
	17W	130Lm/cW	2210Lm	
	19W	130Lm/cW	2470Lm	
	21W	130Lm/cW	2730Lm	
	23W	130Lm/cW	2990Lm	
	25W	130Lm/cW	3250Lm	
	27W	130Lm/cW	3510Lm	
	30W	130Lm/cW	3900Lm	


Net Weight | 3kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office




SILVAIR CASAMBI

Dimensions

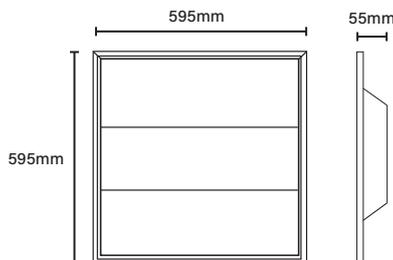

Photometric Data



Energy Efficiency Rating

