




QFrame

Edge-Lit Frame - Tri-Colour
595mmx595mm

Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>80
• Power Factor	>0.9
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Aluminium & Polycarbonate
• IP Rating	IP20
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	262Lm

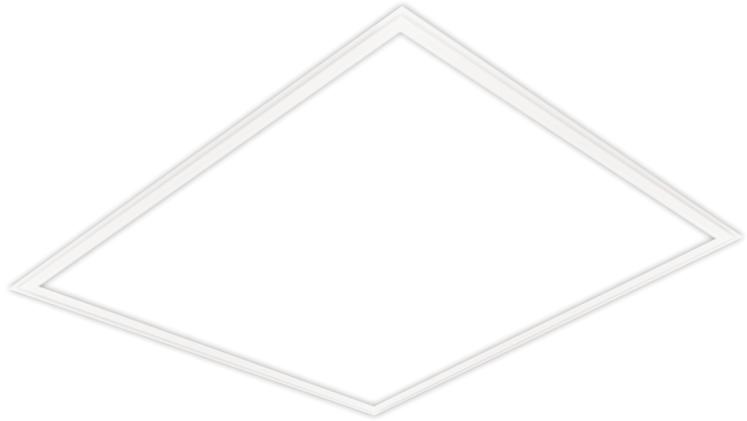

QFrame Features



QFrame

Part Code	Power	Efficacy	Output	Kelvin
QFRAME-40-6X6TC	40W	105Lm/cW	4200Lm	Tri-Colour: 3000K, 4000K & 6000K

Net Weight | 0.495kg

Option

Option Code


Dimming Options

See Below -
Contact Office



SILVAIR CASAMBI

Dimensions

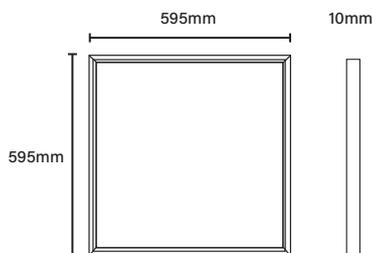

Photometric Data

