

SPECIFICATION




Serene

Premium Architectural Panel - 4000K
595mmx595mm

Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>80
• Power Factor	>0.9
• Typical UGR	<17
• Operating Temp.	-20 to +50°C
• Materials	Anodised Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	300Lm

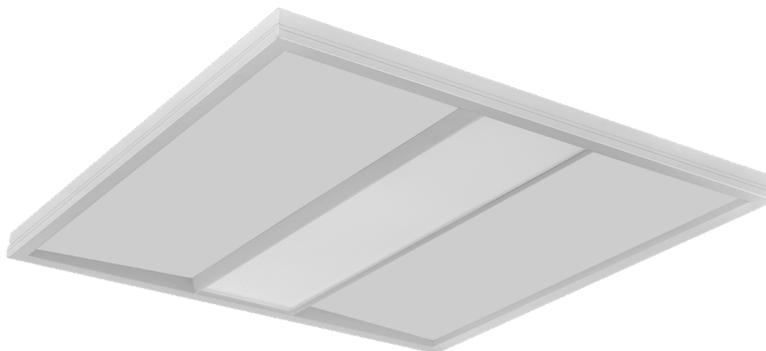

Serene Features



IP44 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



Architectural Design

Serene

Part Code	Power	Efficacy	Output	Kelvin
SER-WS-6X6NW	15W	120Lm/cW	1800Lm	4000K
	17W	120Lm/cW	2040Lm	
	19W	120Lm/cW	2280Lm	
	21W	120Lm/cW	2520Lm	
	23W	120Lm/cW	2760Lm	
	25W	120Lm/cW	3000Lm	
	27W	120Lm/cW	3240Lm	
	30W	120Lm/cW	3600Lm	


Net Weight | 2.8kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

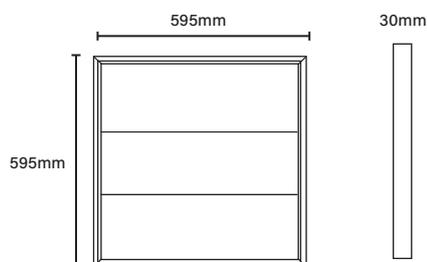

Photometric Data

