




Polo

Ring Pendant

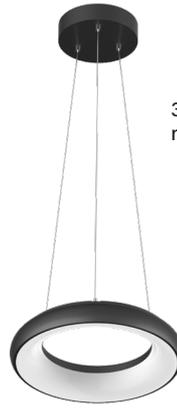

3-wire suspension or surface mounted models available (see codes below)



Technical

• Input Voltage	AC 200-240V
• Beam Spread	120°
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to +45°C
• Materials	Aluminium & Polycarbonate
• IP Rating	IP40
• Dimmable	Triac Dimming
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	N/A

Polo Features



Direct/Indirect Output



Low Glare Diffuser



2 Mounting Options



Triac Dimmable As Standard


Polo

Part Code	Mounting	Power	Efficacy	Output	Kelvin
POLO-35-400BNW/SUR/MD	Surface	35W	94Lm/cW	3290Lm	4000K
POLO-35-400BNW/SUS/MD	Suspended	35W	94Lm/cW	3290Lm	4000K


Net Weight | 1.55kg

Option	Option Code
Custom RAL Options	Contact Office
25W, 300mm Diameter Model	Contact Office

Dimensions

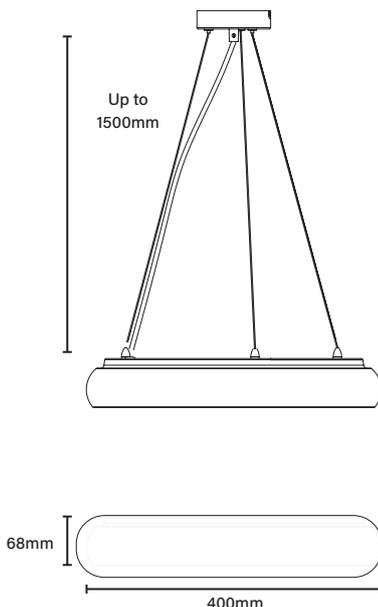

Photometric Data



Energy Efficiency Rating

