



QPac Pro

Linear Batten



Technical

• Input Voltage	AC 220-240V
• Beam Spread	120°
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to +40°C
• Materials	Metal & Polycarbonate
• IP Rating	IP20
• Dimmable	On Request
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	375Lm

QPac Features



Easy-Release
Diffuser



BESA
Mounting Points



Conduit
Side Entry



Tri-Colour
3000K/4000K/6000K

QPac Tri-Colour & Wattage Switchable - Non Sensor Model

Part Code	Size	Power	Efficacy	Output	Kelvin
QPAC-PRO-WS2-600TC	600mm (2ft.)	10W	150Lm/cW	1500Lm	Tri-Colour: 3000K, 4000K & 6000K
		15W	150Lm/cW	2250Lm	
		20W	150Lm/cW	3000Lm	
		25W	150Lm/cW	3750Lm	
QPAC-PRO-WS2-1200TC	1200mm (4ft.)	15W	150Lm/cW	2250Lm	Tri-Colour: 3000K, 4000K & 6000K
		20W	150Lm/cW	3000Lm	
		25W	150Lm/cW	3750Lm	
		30W	150Lm/cW	4500Lm	
QPAC-PRO-WS2-1500TC	1500mm (5ft.)	20W	150Lm/cW	3000Lm	
		25W	150Lm/cW	3750Lm	
		30W	150Lm/cW	4500Lm	
		35W	150Lm/cW	5250Lm	
QPAC-PRO-WS2-1800TC	1800mm (6ft.)	25W	150Lm/cW	3750Lm	
		30W	150Lm/cW	4500Lm	
		35W	150Lm/cW	5250Lm	
		42W	150Lm/cW	6300Lm	

Net Weight	Length (A)	Ft.	Wattage
1.59kg	1200mm	4ft.	20W
1.68kg	1200mm	4ft.	40W
1.9kg	1500mm	5ft.	30W
2.08kg	1500mm	5ft.	60W
2.47kg	1800mm	6ft.	40W
2.5kg	1800mm	6ft.	67W

Options	Option Code
3 Hour Emergency	+ /EM
PIR Sensor	+ /PIR
Emergency & PIR Sensor	+ /EM/PIR
Step-Dim Microwave Sensor	+ /MS
Emergency & Microwave	+ /ME
Other Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Accessories


Part Code: QPIR-BATTEN
Remote Control PIR Sensor For
QPac Linear Battens

Part Code: QPIR-BATTEN-REMOTE
Remote For QPIR-BATTEN

Part Code: QPIR-BATTEN-DIAL
Manual (Dial) Control PIR Sensor
For Linear Battens



Dimensions

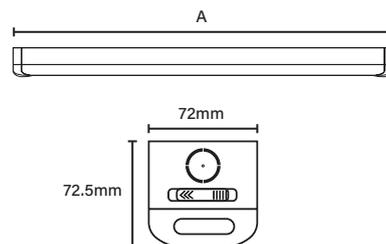

Photometric Data

