



SpecLine

Architectural Linear

For Suspension & Surface Mounting

1200mm

Rear LED Clip-in For Additional Uplight

Technical

• Input Voltage	AC 220-240V
• IP Rating	IP20
• Mains Frequency	50/60 Hz
• Diffuser Type	Microprismatic
• CRI	>80
• Operating Temp.	-25°C to +40°C
• Materials	Aluminium
• Dimmable	Dali Dimmable As Standard
• Emergency Output	300Lm



Microprismatic Diffuser
(Low Glare)



Wattage Switchable



DALI Dimmable
(As Standard)



Tri-Colour
(3000K/4000K/5000K)

SpecLine - Black Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
SPECL-WS-1200TC	1200x60x75mm	24W	120Lm/cW	2880Lm	Tri-Colour: 3000K, 4000K & 5000K
		32W	120Lm/cW	3840Lm	
		40W	120Lm/cW	4800Lm	

Net Weight | 14.04kg

SpecLine - White Housing

Part Code	Size	Power	Efficacy	Output	Kelvin
SPECL-WS-1200TC/WH	1200x60x75mm	24W	120Lm/cW	2880Lm	Tri-Colour: 3000K, 4000K & 5000K
		32W	120Lm/cW	3840Lm	
		40W	120Lm/cW	4800Lm	

Net Weight | 14.04kg

>80% down & 20% option - when using uplight accessory.

Option

Option Code


3 Hour Emergency

+ /EM



SILVAIR CASAMBI

Dimensions

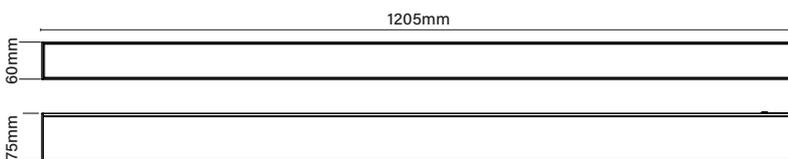

Indirect Accessories

Part Code:

SPECLINE-1200/UPLIGHT/WH
(White Housing)



Part Code:

SPECLINE-1200/UPLIGHT
(Black Housing)



Photometric Data

