



SpecLine


Architectural Linear

For Suspension & Surface Mounting

1500mm

Technical


• Input Voltage	AC 220-240V
• IP Rating	IP20
• Mains Frequency	50/60 Hz
• Diffuser Type	Microprismatic
• CRI	>80
• Operating Temp.	-25°C to +40°C
• Materials	Aluminium
• Dimmable	Dali Dimmable As Standard
• Emergency Output	300Lm

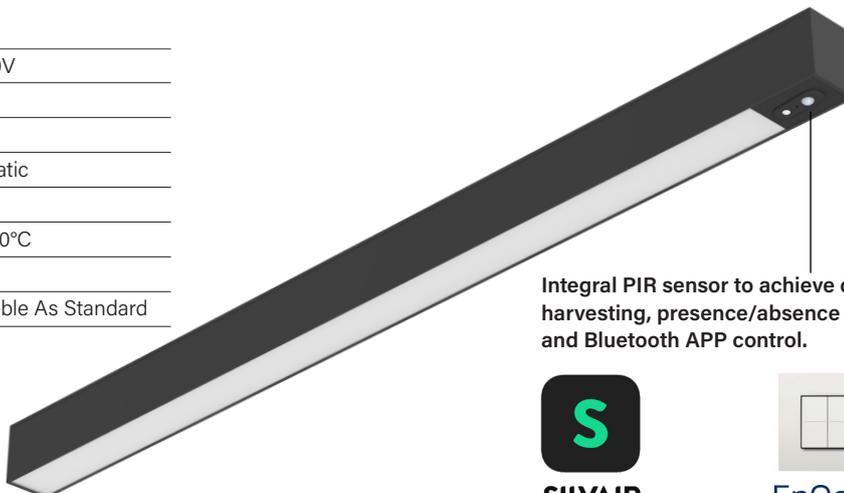

Integral PIR sensor to achieve daylight harvesting, presence/absence detection and Bluetooth APP control.



SILVAIR
Silvair App Commissioned



EnOcean
En Ocean Switch Compatible

SpecLine - Silvair Features



Microprismatic Diffuser (Low Glare)



DALI Dimmable (As Standard)



Tri-Colour (3000K/4000K/5000K)



Bluetooth® NLC

SpecLine - Silvair - Black Housing

Part Code	Size	*Power	Efficacy	Max Output	Kelvin
SL-SILVAIR-WS-1500TC	1505x60x75mm	10W to 50W	120Lm/cW	6000Lm	Tri-Colour: 3000K, 4000K & 5000K
			120Lm/cW		
			120Lm/cW		



Net Weight | 20.98kg

Sensor Data


Power	Signal	Current	Dimming Curve	Dimming Method	Operating Temperature
12-24VDC	Bluetooth	Max.30mA	Logarithmic	PWM	0°C-+45°C

Option	Option Code
3 Hour Emergency	+EM

Coverage Side View

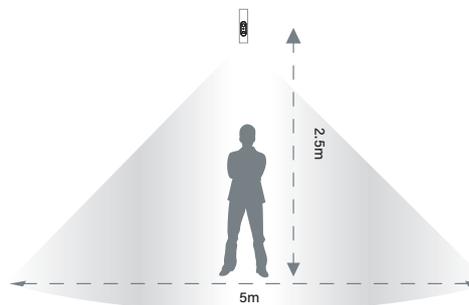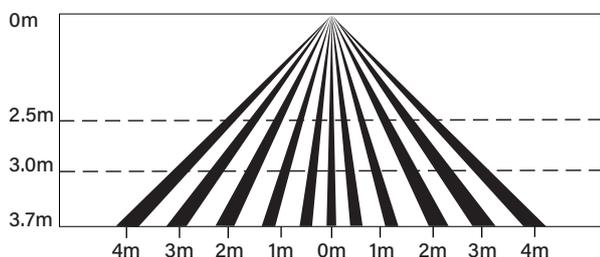

Photometric Data



Dimensions

