



# SpecLine


Architectural Linear

For Suspension & Surface Mounting

1800mm

### Technical

• Input Voltage	AC 220-240V
• IP Rating	IP20
• Mains Frequency	50/60 Hz
• Diffuser Type	Microprismatic
• CRI	>80
• Operating Temp.	-25°C to +40°C
• Materials	Aluminium
• Dimmable	DALI Dimming
• Emergency Output	300Lm

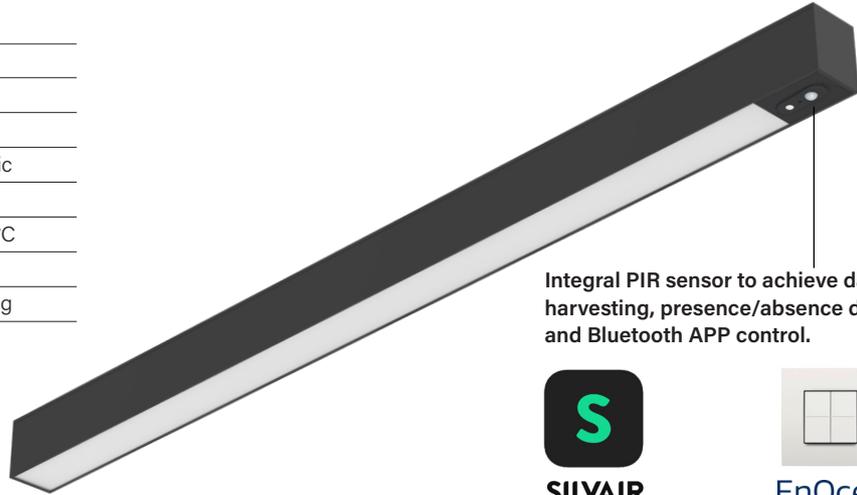

Integral PIR sensor to achieve daylight harvesting, presence/absence detection and Bluetooth APP control.



SILVAIR  
Silvair App Commissioned



EnOcean  
En Ocean Switch Compatible

### SpecLine - Silvair Features



Microprismatic Diffuser  
(Low Glare)



DALI Dimmable  
(As Standard)



Tri-Colour  
(3000K/4000K/5000K)

SILVAIR



Bluetooth® NLC

### SpecLine - Silvair - Black Housing

Part Code	Size	*Power	Efficacy	Max Output	Kelvin
SL-SILVAIR-WS-1800TC	1805x60x75mm	10W to 60W	120Lm/cW	7200Lm	Tri-Colour: 3000K, 4000K & 5000K
			120Lm/cW		
			120Lm/cW		


Net Weight | 27.92kg

### Sensor Data


Power	Signal	Current	Dimming Curve	Dimming Method	Operating Temperature
12-24VDC	Bluetooth	Max.30mA	Logarithmic	PWM	0°C-+45°C

Option	Option Code
3 Hour Emergency	+ /EM


### Coverage Side View

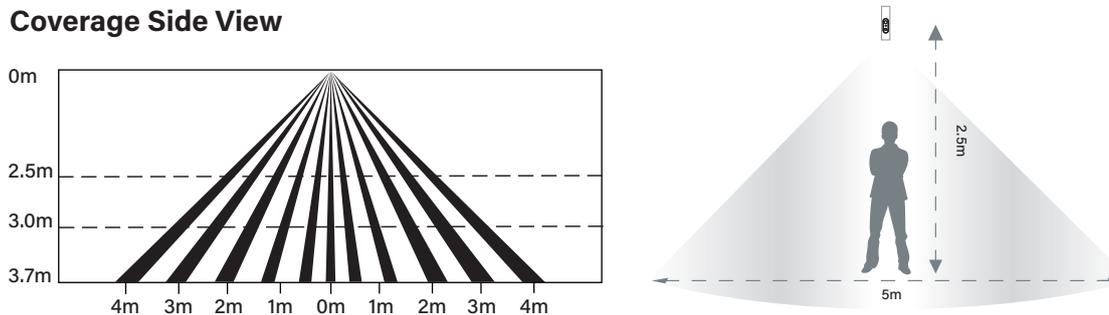

### Photometric Data



### Dimensions

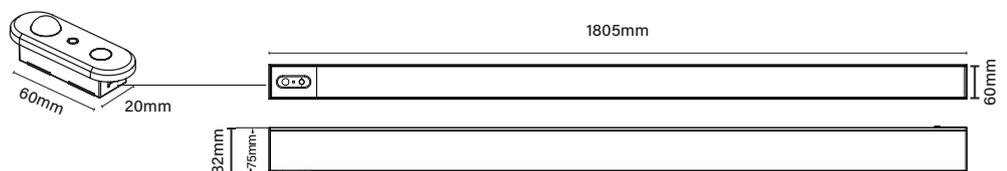

### Energy Efficiency Rating