



SportPro2

Sports Hall Linear



Surface Kit Included

Technical

• Input Voltage	AC 220-240V
• Beam Spread	80°
• CRI	>80
• Power Factor	>0.95
• Operating Temp.	-20 to +40°C
• Materials	Metal & Polycarbonate
• Ball-Impact Resistance	DIN 18032-3
• IK Rating	IK10
• Dimmable	Dali Dimmable As Standard
• Lifetime	100,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	700Lm

SportPro Features



All-Impact Tested



Flicker-Free



Microprismatic Diffuser (Low Glare)



IK10 Impact Resistance



As Standard

SportPro2

Part Code	Size	Power	Efficacy	Output	Kelvin
SPL2-150-1500NW	1500mm (5ft.)	45-150W	140Lm/cW	21000Lm	4000K

Net Weight | 10.32kg

Options

Option Code

3 Hour Emergency	+/EM
Dimmable Options	On Request



Switch Dim



1-10V



DSI



Phase Dim

SILVAIR CASAMBI

Accessory


Part Code	Description
SPL-SURFACEKIT	Surface Kit (Rotation For Asymmetric)



Asymmetric Surface Kit & Suspension Chain

Part Code	Description
SPL-SUSPENSION	Suspension Kit

Dimensions

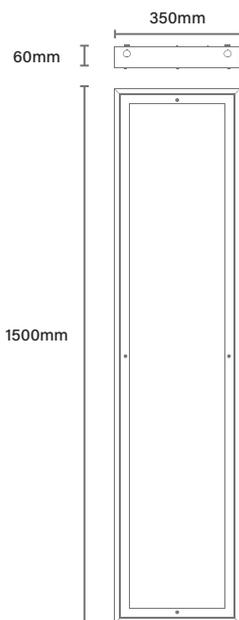

Photometric Data

