



Taurus Slim

Tri-Colour Bulkhead

Technical

• Input Voltage	AC 220-240V
• Beam Spread	120°
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to +40°C
• Materials	Polycarbonate
• IP Rating	IP65
• IK Rating	IK10
• Dimmable	On Request
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	105Lm



Taurus Slim Tri-Colour Bulkhead Features



IP66 Ingress Protection



IK10 Impact Resistance



Hinged Gear Tray



Tri-Colour
3000K/4000K/6000K


Taurus Slim - Tri Colour				
Part Code	Power	Efficacy	Output	Kelvin
TAU2-S-WS-315TC	8W	105Lm/cW	840Lm	Tri-Colour: 3000K, 4000K & 6000K
	12W	105Lm/cW	1260Lm	
	15W	105Lm/cW	1575Lm	
	18W	105Lm/cW	1890Lm	
Net Weight 0.89kg				

Option	Option Code
3 Hour Emergency	+/EM
Step-Dim Microwave Sensor	+/M
Emergency & Microwave	+/M/EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

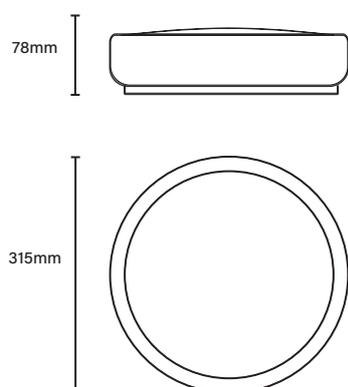

Photometric Data

