



# Taurus Bulkhead

Tri-Colour & Power Selectable

## Technical

• Input Voltage	AC 220-240V
• Beam Spread	120°
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to +40°C
• Materials	Polycarbonate
• IP Rating	IP65
• IK Rating	IK10
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	105Lm



## Taurus - Tri Colour Features



IP65 Ingress Protection



IK10 Impact Resistance



Screwless Design



BESA Mounting Points

## Taurus

Part Code	Power	Efficacy	Output	Kelvin
TAU2-WS-325TC	8W	105Lm/cW	840Lm	Tri-Colour: 3000K, 4000K & 6000K
	12W	105Lm/cW	1260Lm	
	15W	105Lm/cW	1575Lm	
	18W	105Lm/cW	1890Lm	

Net Weight | 0.89kg

## Option

## Option Code

3 Hour Emergency	+/EM
Manual/Self Test EM Switch	+/ST (Coming Soon)
Step-Dim Microwave Sensor	+/M
Emergency & Microwave	+/M/EM
Other Dimming Options	See Below - Contact Office



**SILVAIR CASAMBI**

## Accessories

### Bezel Attachments Available


Part Code: **TAU-CHROME**  
Chrome Bezel Attachment




Part Code: **TAU-BLK**  
Black Bezel Attachment



## Photometric Data



## Dimensions

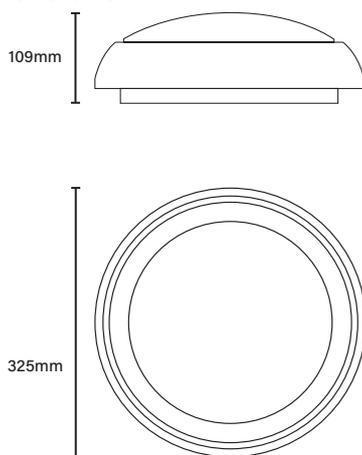

# Taurus Bolt

Plug & Play Version  
Coming Soon

