



Vex

Commercial Bulkhead

Technical

• Input Voltage	AC 220-240V
• CRI	>80
• Power Factor	>0.9
• Operating Temp.	-20 to 40°C
• Materials	Polycarbonate
• IP Rating	IP66
• IK Rating	IK10
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	262Lm (300TC/360TC) 277Lm (420TC)



Vex Features



IP66 Ingress Protection



IK10 Impact Resistance



Conduit Side Entry



Tri-Colour

Vex

Part Code	Size	Power	Efficacy	Output	Kelvin
VEX2-WS-300NW	300mm	12W	105Lm/cW	1260Lm	4000K
		16W	105Lm/cW	1680Lm	
		20W	105Lm/cW	2100Lm	
		25W	105Lm/cW	2625Lm	
VEX2-WS-360TC	360mm	12W	105Lm/cW	1260Lm	Tri-Colour: 3000K, 4000K & 6000K
		16W	105Lm/cW	1680Lm	
		20W	105Lm/cW	2100Lm	
		25W	105Lm/cW	2625Lm	
VEX-WS-420NW	420mm	13W	111Lm/cW	1443Lm	4000K
		15W	111Lm/cW	1665Lm	
		17W	111Lm/cW	1887Lm	
		19W	111Lm/cW	2109Lm	
		21W	111Lm/cW	2331Lm	
		23W	111Lm/cW	2553Lm	
		25W	111Lm/cW	2775Lm	
		27W	111Lm/cW	2997Lm	


Net Weight	(A x B)
0.6kg	300mm x 95mm
0.9kg	360mm x 105mm
1.6kg	420mm x 112mm

Option	Option Code
3 Hour Emergency	+/EM
Step-Dim Microwave Sensor	+/M
Emergency & Microwave	+/M/EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

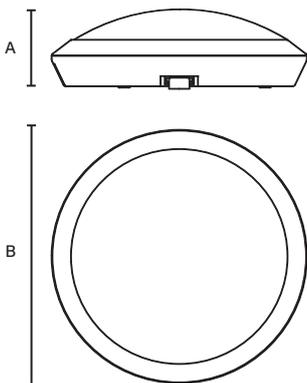

Photometric Data

