




FRD Elite Tilt

Adjustable Fire Rated Downlight
Magnetic Bezel

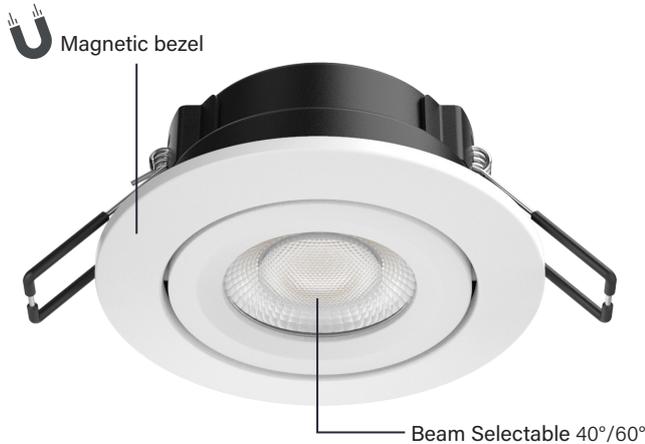

Technical

• Input Voltage	AC 230V
• Tilt Angle	20°
• Beam Spread	40°/60°
• CRI	>80
• Power Factor	>0.8
• Lamp Type	SMD
• Operating Temp.	50 to +40°C
• Terminal Block	Loop in / Out Push Fit With Cable Clamp
• IP Rating	IP65 From Facia
• Fire Rating	BS476-21: 30/60/90min
• Dimmable	Trailing Edge
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• I-Joist	Certified
• Cut Out	80mm
• Building Regs	Part L
• Emergency Output	N/A

FRD Elite Tilt Features

- IP65 Ingress Protection
- 30/60/90 Fire Rating (BS476-21 Standard)
- Wattage Switchable
- Quad Colour (2700K/3000K/4000K/6000K)

FRD Elite Tilt

Part Code	Power	Efficacy	Output	Kelvin
FRD-ELITE-TILT-WS-QC	4W	95Lm/cW	380Lm	2700K
	6W	95Lm/cW	570Lm	
	4W	100Lm/cW	400Lm	3000K
	6W	100Lm/cW	600Lm	
	4W	110Lm/cW	440Lm	4000K
	6W	110Lm/cW	660Lm	
	4W	100Lm/cW	400Lm	6000K
	6W	100Lm/cW	600Lm	

Net Weight | 0.33kg

Option	Option Code
Dimming Options	Mains Dim Only

Accessories

(White bezel supplied as standard)




Optional Bezels Available



Accessory	Description
FRD-ELITE-TILT-BLK	Black Twist & Lock Bezel for FR-ELITE-TILT-WS-QC
FRD-ELITE-TILT-POLISHED	Polished Twist & Lock Bezel for FR-ELITE-TILT-WS-QC
FRD-ELITE-TILT-BRUSHED	Brushed Twist & Lock Bezel for FR-ELITE-TILT-WS-QC

Dimensions



Photometric Data

