



# FRD SLG

## Low Glare Fire Rated Downlight



### Technical

• Input Voltage	AC 230V
• Beam Spread	40°
• CRI	>90
• Power Factor	>0.9
• Lamp Type	COB
• Operating Temp.	50 to +75°C
• IP Rating	IP65
• Fire Rating	BS476-21: 30/60/90min
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Cut Out	70mm
• Building Regs	Part L
• Emergency Output	237Lm

### FRD SLG Features



IP65 Ingress Protection



30/60/90 Fire Rating (BS476-21 Standard)



Wattage Switchable



Tri Colour (2700K/3000K/4000K)



Black Available

#### FRD-SLG White Housing

Part Code	Power	Efficacy	Output	Kelvin
FRD-SLG-10CCT/CRI90/WH	10W	95Lm/cW	950LM	Tri-Colour: 2700K, 3000K & 4000K

Net Weight | 0.35kg

#### FRD-SLG Black Housing

Part Code	Power	Efficacy	Output	Kelvin
FRD-SLG-10CCT/CRI90/BK	10W	95Lm/cW	950LM	Tri-Colour: 2700K, 3000K & 4000K

Net Weight | 0.35kg

#### Option | Option Code

3 Hour Emergency (Indicator in Bezel)	+ /EM
Dimming Options	See Below - Contact Office



### Accessories


(white supplied as standard with white fitting)



(black supplied as standard with black fitting)



### Dimensions

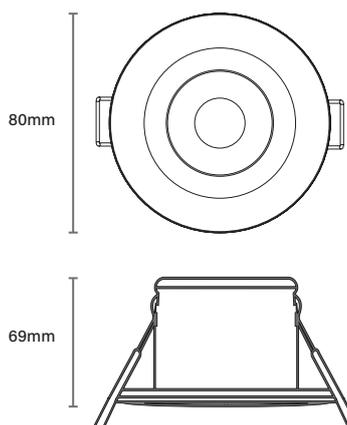

### Photometric Data

