



Helios PRO

IP67 Recessed Downlight
110mm Diameter



Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal/Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.9
• Typical UGR	<19
• Operating Temp.	-20 to +65°C
• Materials	Aluminium & Polycarbonate
• IP Rating	IP67
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25°C)
• Cut Out	95mm
• Emergency Output	337Lm (TC Range) 275Lm (LG Range)

Helios Features

- IP67 Ingress Protection
- TP(a) Fire Rating
- Back-Lit Luminaire
- Tri-Colour
3000K/4000K/6000K
- 3 Pin Push Connector
As Standard

Helios PRO				
Part Code	Power	Efficacy	Output	Kelvin
H65-PRO-WS-110TC	6W	135Lm/cW	810Lm	Tri-Colour: 3000K, 4000K & 6000K
	8W	135Lm/cW	1080Lm	
	9W	135Lm/cW	1215Lm	
	10W	135Lm/cW	1350Lm	
Helios Pro - Low Glare Diffuser				
Part Code	Power	Efficacy	Output	Kelvin
H65-PRO-WS-110TC/LG	6W	110Lm/cW	660Lm	Tri-Colour: 3000K, 4000K & 6000K
	8W	110Lm/cW	880Lm	
	9W	110Lm/cW	990Lm	
	10W	110Lm/cW	1100Lm	
Net Weight 0.505kg				

Option	Option Code
3 Hour Emergency (Indicator in Bezel)	+ /EM
Dimming Options	See Below - Contact Office


SILVAIR CASAMBI

Accessories


Black Bezel Available
Part Code: H65-110-BEZEL-BLK



Dimensions

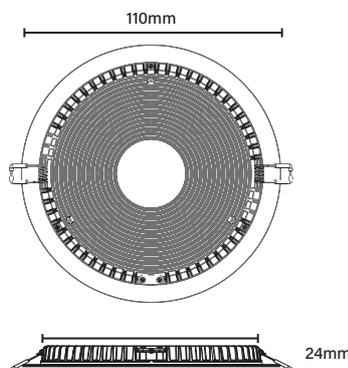

Photometric Data



Energy Efficiency Rating

