



Helios PRO

IP67 Recessed Downlight
230mm Diameter



Technical

| | |
|--------------------|-------------------------------------|
| • Input Voltage | AC 200-240V |
| • Diffuser Type | Opal/Microprismatic |
| • Beam Spread | 90° |
| • CRI | >85 |
| • Power Factor | >0.9 |
| • Typical UGR | <19 |
| • Operating Temp. | -20 to +65°C |
| • Materials | Aluminium & Polycarbonate |
| • IP Rating | IP67 |
| • Fire Rating | TP(a) |
| • Dimmable | On Request |
| • Lifetime | 50,000 hours, L90-B10 (Ta 25°C) |
| • Cut Out | 200mm |
| • Emergency Output | 337Lm (TC Range) 275Lm (LG Range) |

Helios Features



IP67 Ingress Protection



TP(a) Fire Rating



Back-Lit Luminaire



Tri-Colour
3000K/4000K/6000K



3 Pin Push Connector
As Standard

Helios PRO

| Part Code | Power | Efficacy | Output | Kelvin |
|------------------|-------|----------|--------|--|
| H65-PRO-WS-230TC | 19W | 135Lm/cW | 2565Lm | Tri-Colour: 3000K, 4000K & 6000K |
| | 21W | 135Lm/cW | 2835Lm | |
| | 23W | 135Lm/cW | 3105Lm | |
| | 25W | 135Lm/cW | 3375Lm | |

Helios Pro - Low Glare Diffuser

| Part Code | Power | Efficacy | Output | Kelvin |
|---------------------|-------|----------|--------|--|
| H65-PRO-WS-230TC/LG | 19W | 110Lm/cW | 2090Lm | Tri-Colour: 3000K, 4000K & 6000K |
| | 21W | 110Lm/cW | 2310Lm | |
| | 23W | 110Lm/cW | 2530Lm | |
| | 25W | 110Lm/cW | 2750Lm | |

Net Weight | 0.9kg

Option

3 Hour Emergency
(Indicator in Bezel)
Dimming Options

Option Code

+/EM
See Below -
Contact Office



SILVAIR CASAMBI

Accessories

Black Bezel Available

Part Code: H65-230-BEZEL-BLK




Adjustable Trim for Helios
(215mm to 245mm Cut Out)


Larger Bezel Available

Part Code: H65-ADJ-215-245-TRIM

Dimensions

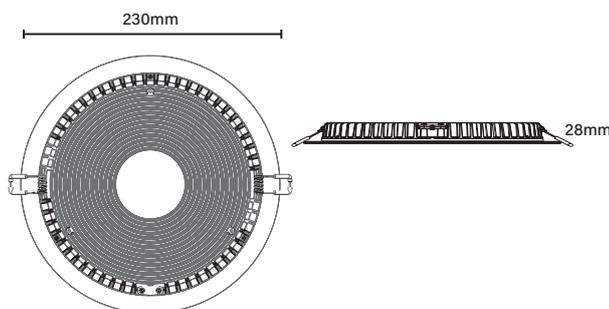

Photometric Data

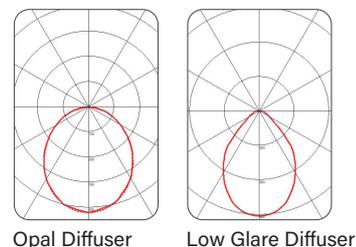

Energy Efficiency Rating

