



# Nova

## Downlight

114mm/174mm/200mm/232mm/280mm Diameter



### Technical

• Input Voltage	AC 200-240V
• Beam Spread	60°
• CRI	>80
• Input Voltage	AC 200-240V
• Power Factor	>0.9
• Typical UGR	<19
• Operating Temp.	-20 to +45°C
• Materials	Aluminium & Polycarbonate
• IP Rating	IP65
• IK Rating	IK06
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Cut Out	100mm/150mm/180mm/205mm/250mm
• Emergency Output	300Lm

### Nova Features



IP65 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



Tri-Colour  
3000K/4000K/5700K



3 Pin Push Connector  
As Standard

### Nova

Part Code	Power	Efficacy	Output	Kelvin
NOVA-WS-114-TC	6W	120Lm/cW	720Lm	Tri-Colour: 3000K, 4000K & 5700K
	8W	120Lm/cW	960Lm	
	10W	120Lm/cW	1200Lm	
NOVA-WS-174-TC	14W	120Lm/cW	1680Lm	
	16W	120Lm/cW	1920Lm	
	20W	120Lm/cW	2400Lm	
NOVA-WS-200-TC	20W	120Lm/cW	2400Lm	
	24W	120Lm/cW	2880Lm	
	28W	120Lm/cW	3360Lm	
NOVA-WS-232-TC	24W	120Lm/cW	2880Lm	
	30W	120Lm/cW	3600Lm	
	35W	120Lm/cW	4200Lm	
NOVA-WS-280-TC	34W	120Lm/cW	4080Lm	
	40W	120Lm/cW	4800Lm	
	50W	120Lm/cW	6000Lm	

### Option

### Option Code

Emergency	+ /EM
Dimming Options	See Below - Contact Office
Square Trim	Available From Factory



**SILVAIR CASAMBI**

Net Weight	ØDiameter (A)	Height (B)	Cut Out
260g	114mm	66mm	100mm
430g	174mm	87mm	150mm
510g	200mm	97mm	180mm
660g	232mm	110mm	205mm
910g	280mm	130mm	250mm

### Accessories

Please see on next page.



Black & White Bezels Available  
(white supplied as standard)




Black & White Drop  
Glass Attachment




Surface Can Attachment

### Dimensions

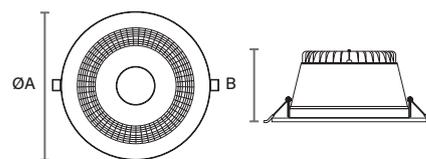

### Photometric Data



### Energy Efficiency Rating

