



QBlade


Multi-Install Exit Sign



Technical

• Input Voltage	AC 220-240V
• Emergency Type	Maintained / Non-Maintained
• IP Rating	IP20
• Mains Input Current	25mA
• Mains Frequency	50/60 Hz
• Inrush Current	3.5A
• AC Voltage Range	AC 140-180V
• Operating Temp.	0 to +45°C
• Materials	Polycarbonate
• Battery Type	3.2V LiFePO4; 1500mAh
• Charge Time	24 Hours
• Legend	ISO Man In Door Arrow Up (Prefitted), Down Left & Right (Included)
• Viewing Distance	30M

QBlade Features



Black Available
(On Request)

Part Code	Power	Output	Viewing Distance	Duration
QBLADE-3H/MT/ST	1W	60Lm*	30m	3 Hours
QBLADE-3H/MT/ST/BLK	1W	60Lm*	30m	3 Hours

Net Weight | 0.385kg

Option	Option Code
Self-Test	Add QBLADE-ST-MOD
DALI Interface	+-DALI2



Parallel Wall Mount
(2x Brackets)



Perpendicular
Wall Mount
(1x Bracket)



Suspension
(2x Wires)



Recessed
(1x Accessory)


Surface mounted as standard (Various accessories available) *Output without blank reflective sheet

Accessories



Accessory	Description
QBLADE-WALL-KIT	Wall Mounting Accessory
QBLADE-REC-KIT	Recessed Mounting Accessory
QBLADE-SUS-KIT	1.5m Suspension Accessory
QBLADE-ST-MOD	Self-Test Module (Only Required With QBLADE-3H)

Dimensions

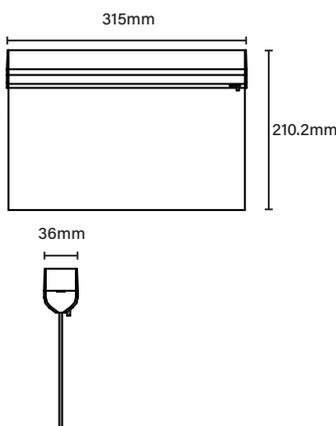

**DALI & SILVAIR
FROM STOCK**

