



QBox-SE

Emergency Exit Box



SLIM VERSION available
Part Code: QBOX
(Arrow Up As Standard)

Technical

• Input Voltage	AC 220-240V
• Auxiliary Lighting	Downwards Facing LED Panel & Light Shade
• Emergency Type	Maintained / Non-Maintained
• IP Rating	IP20
• Mains Input Current	22mA
• Mains Frequency	50/60 Hz
• Inrush Current	1.5A
• AC Voltage Range	AC 144-187V
• Operating Temp.	5°C to +45°C
• Materials	Polycarbonate
• Battery Type	3.2V LiFePO4; 1500mAh
• Charge Time	24 Hours
• Legend	ISO Man In Door Arrow Up (Prefitted), Down Left & Right (Included)
• Viewing Distance	30M

QBox Features



Auxiliary Lighting
From Below



Legend Pack
Included



30m Viewing
Distance



Conduit
Side Entry

Manual Test & Self Test
As Standard

QBox-SE/MT/ST

Part Code	Power	Output	Viewing Distance	Duration	Colour
QBOX-SE/MT/ST	1W	60Lm	30m	3 Hours	WHITE
QBOX/BLK	1W	60Lm	30m	3 Hours	BLACK

Net Weight | 0.53kg

Option

Option Code

DALI Interface	+3H-DALI2
----------------	-----------

Accessories




Legend
Stickers
Included

Black Housing (Code Above)



Dimensions

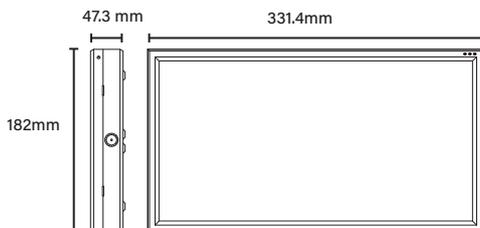

**DALI & SILVAIR
FROM STOCK**

