



QBrick

Emergency Bulkhead



Technical

| | |
|-----------------------|---|
| • Input Voltage | AC 220-240V |
| • Emergency Type | Maintained / Non-Maintained |
| • IP Rating | IP65 |
| • Mains Input Current | 50mA |
| • Mains Frequency | 50/60 Hz |
| • Inrush Current | 1.5A |
| • AC Voltage Range | AC 144-187V |
| • Operating Temp. | 5°C to +40°C |
| • Materials | Polycarbonate |
| • Battery Type | 3.2V LiFePO4; 1500mAh |
| • Charge Time | 24 Hours |
| • Legend | ISO Man In Door Arrow Up, Down, Right & Left (Included) |
| • Viewing Distance | 20M |

QBrick Features



Toolless Design



Lithium Iron (LiFePO4) Phosphate Battery



Hinged Gear Tray



Black Available (On Request)

QBrick

| Part Code | Power | Output | Viewing Distance | Duration | Colour |
|-------------------|-------|--------|------------------|----------|--------|
| QBRICK2-3H-MT | 1W | 150Lm | 20m | 3 Hours | WHITE |
| QBRICK2-3H-MT/BLK | 1W | 150Lm | 20m | 3 Hours | BLACK |

Net Weight | 0.475kg

Option

Option Code


| | |
|----------------|----------|
| Self-Test | + -ST |
| Manual-Test | + -MT |
| DALI Interface | + -DALI2 |

Accessories






Legend Stickers Included

Photometric Data



Dimensions

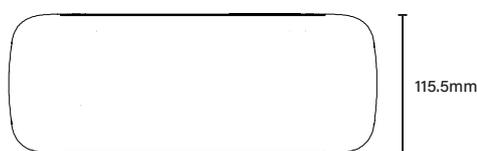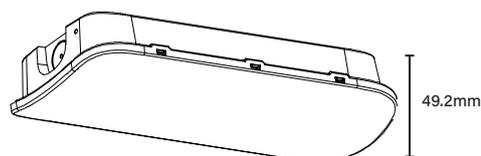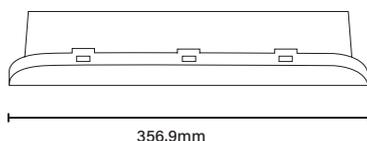

DALI & SILVAIR FROM STOCK

