



Eclipse Bolt

Exterior Bulkhead (Plug & Play)

Technical

• Input Voltage	AC 200-240V
• Beam Spread	120°
• CRI	>80
• Power Factor	>0.95
• Operating Temp.	-20 to +50°C
• Materials	Die-Cast Aluminium & Polycarbonate
• IP Rating	IP65
• IK Rating	IK10
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	300Lm



Eclipse Features



IP65 Ingress Protection



IK10 Impact Resistance



Conduit Side Entry



Tri-Colour
(3000K/4000K/6000K)

Eclipse

Part Code	Power	Efficacy	Output	Kelvin
EC-BOLT-WS-TC (Full Moon)	12W	120Lm/cW	1440Lm	Tri-Colour: 3000K, 4000K & 6000K
	15W	120Lm/cW	1800Lm	
	17W	120Lm/cW	2040Lm	
	20W	120Lm/cW	2400Lm	
EC-BOLT-WS-TC/HM (Half Moon)	12W	115Lm/cW	1380Lm	Tri-Colour: 3000K, 4000K & 6000K
	15W	115Lm/cW	1725Lm	
	17W	115Lm/cW	1955Lm	
	20W	115Lm/cW	2300Lm	

Full Moon Net Weight | 1.45kg /Half Moon Net Weight | 1.5kg

Options

Options	Option Code
Dimmable	On Request
Emergency & Microwave	+/EM/MS



Plug & Play Accessories

Emergency Kits

Emergency Kit for
EC-BOLT-WS-TC / EC-BOLT-WS-TC/HM

Part Code

LME-BOLT-MT-EMKIT/MT/ST



Microwave Sensor


Micro Sensor for
EC-BOLT-WS-TC / EC-BOLT-WS-TC/HM

Part Code


EC-BOLT-MICRO




Dimensions -Full Moon

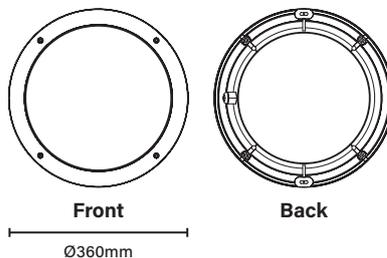

Dimensions -Half Moon

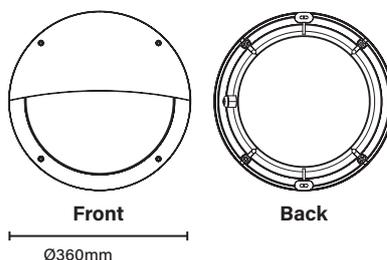

Photometric Data

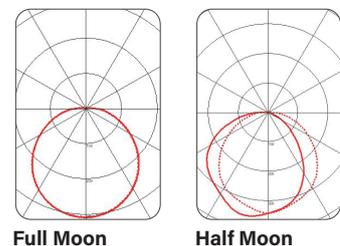

Full Moon

Half Moon

Energy Efficiency Rating

