



# Baylite Pro

## Low Bay

### Technical

• Input Voltage	AC 200-240V
• Beam Spread	80°
• CRI	>80
• Power Factor	0.97
• Operating Temp.	-20 to +50°C
• Materials	Aluminium & Polycarbonate
• IP Rating	IP65
• IK Rating	IK10
• Dimmable	1-10V
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Cable Flex	1.5M
• Emergency Output	700Lm



### Baylite Pro

- IP65 Ingress Protection
- IK10 Impact Resistance
- Wattage Switchable
- 1-10V Dimmable (as standard)
- 1.5m Cable Flex

Baylight Pro				
Part Code	Power	Efficacy	Output	Kelvin
BP-WS-4K	50W	140Lm/cW	7000Lm	4000K
	75W	140Lm/cW	10500Lm	
	100W	140Lm/cW	14000Lm	
	125W	140Lm/cW	17500Lm	
	150W	140Lm/cW	21000Lm	
	175W	140Lm/cW	24500Lm	
	200W	140Lm/cW	28000Lm	
Net Weight   7.5kg				

Options	Option Code
3 Hour Emergency	+/MT/ST
PIR Sensor	+/PIR
Emergency & PIR Sensor	+PIR/MT/ST
Dimming Options	See Below - Contact Office



**SILVAIR CASAMBI**


### Accessories

Part Code	Description
BP-SBRACKET	Surface Mount Kit (Rotate for Asymmetric Distribution)



Wattage switchable from 0 to 200W via dial on back of fitting.

### Dimensions

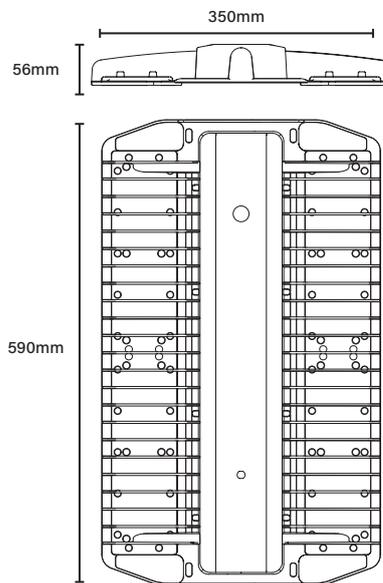

### Photometric Data

