



Glow UFO ECO

Wattage Selectable & 4000K

Technical

• Input Voltage	AC 220-240V
• Beam Spread	90°
• CRI	>80
• Power Factor	>0.95
• Operating Temp.	-35 to +50°C
• Materials	Die-Cast Aluminium
• Lens Material	Polycarbonate
• IP Rating	IP65
• IK Rating	IK08
• Dimmable	1-10V
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	850Lm



Glow UFO ECO Features



IP65 Ingress Protection



1.5m Cable Flex



Die-Cast Housing



1-10V Dimmable (as standard)



Wattage Switchable

Glow UFO Eco


Part Code	Power	Efficacy	Output	Kelvin
GU-ECO-WS-4K	100W	170Lm/cW	17000Lm	4000K
	150W	170Lm/cW	25500Lm	
	200W	170Lm/cW	34000Lm	

Net Weight | 1.8kg

Options

Options	Option Code
3 Hour Emergency (Hardwired)	+ /EM
No Sensor Option	N/A

Dimensions

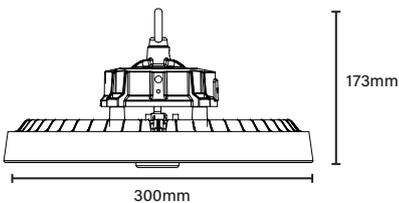

Photometric Data

