



Ambience

Direct/Indirect Panel - 4000K
1195mmx295mm/1495mmx295mm

Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>80
• Power Factor	>0.9
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP40
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	312Lm



2 or 3 point adjustable suspension included (3m)

Ambience Features



Direct/Indirect Output



Microprismatic Diffuser
Low Glare



3m Inverted Y Suspension



Aluminium Housing



First Fix Connector

Ambience

Part Code	Size	Power	Efficacy	Output Split ↓ ↑	Kelvin
AMB-MP-30-12X3NW	1195mm (4ft.)	30W	125Lm/cW	750Lm ↑ 3000Lm ↓	4000K
AMB-MP-30-15X3NW	1495mm (5ft.)	30W	125Lm/cW	750Lm ↑ 3000Lm ↓	
Net Weight	Length (A)	Length (B)			
3.5kg	1195mm	295mm			
4.38kg	1495mm	295mm			

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI


Accessories

Part Code: AMB-EM-HOLDER

Emergency Indicator Kit
(With Bracket, Cable & Screws Included)



Dimensions

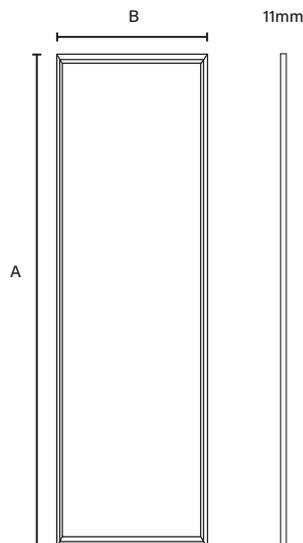

Photometric Data

