

SPECIFICATION




Boreal

Tuneable White Edge-Lit Panel
595mmx595mm

Technical

| | |
|--------------------|----------------------------------|
| • Input Voltage | AC 200-240V |
| • Diffuser Type | Microprismatic |
| • Beam Spread | 90° |
| • CRI | >85 |
| • Power Factor | >0.9 |
| • Typical UGR | <17 |
| • Operating Temp. | -20 to +50°C |
| • IP Rating | IP44 |
| • Fire Rating | TP(a) |
| • Dimmable | On Request |
| • Lifetime | 50,000 hours, L90-B10 (Ta 25 °C) |
| • Emergency Output | 300Lm |

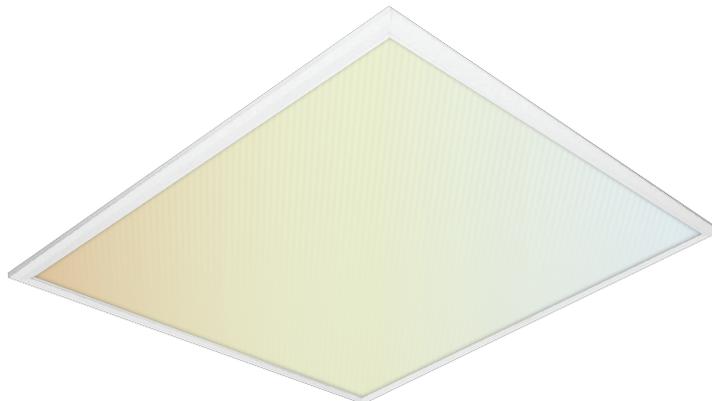

Boreal Features

- Tuneable White Technology
- Bluetooth or DALI (DTB) Option
- IP44 Ingress Protection
- TP(a) Fire Rating
- First Fix Connector

Boreal

| Part Code | Power | Efficacy | Output | Kelvin |
|--------------|-------|----------|--------|-----------------------------|
| BOR-38-6X6TW | 38W | 120Lm/cW | 4560Lm | Tuneable: 2700K to 6500K |

Net Weight | 2.6kg

| Option | Option Code |
|------------------|-------------|
| 3 Hour Emergency | + /EM |
| CASAMBI | |

Tuneable White Controls



Up to 4 Scenes



60m Range



Wireless Functionality



Magnetic Wall Cradle

4remote BT App
Control your tuneable white luminaires remotely.




Accessories

Tuneable White Controls

Part Code: Q-DIM-USER-INT-W
White

Part Code: Q-DIM-USER-INT
White

Dimensions

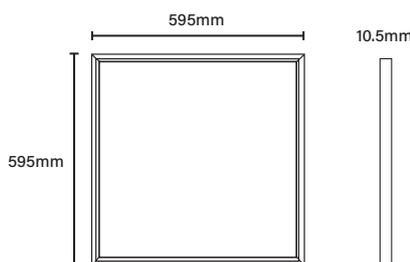

Photometric Data

