



Lynx Advance

Opal Edge-Lit Panel - 4000K
1195mmx295mm



Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	375Lm

Lynx Features

- IP44 Ingress Protection
- TP(a) Fire Rating
- Wattage Switchable
- 150 High LED Efficacy
- First Fix Connector

Lynx Advance

Part Code	Power	Efficacy	Output	Kelvin
LYNX-AV3-WS-12X3NW	20W	150Lm/cW	3000Lm	4000K
	24W	150Lm/cW	3600Lm	
	26W	150Lm/cW	3900Lm	
	30W	150Lm/cW	4500Lm	


Net Weight | 2.7kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office




SILVAIR CASAMBI

Dimensions

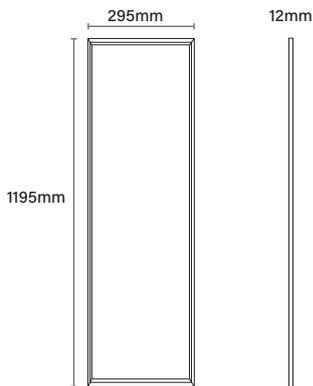

Photometric Data



Energy Efficiency Rating

