



Lynx LG

Low Glare Edge-Lit Panel - 4000K
1195mmx295mm



Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<17
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	350Lm

Lynx LG Features



IP44 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



Microprismatic Diffuser Low Glare



First Fix Connector

Lynx LG

Part Code	Power	Efficacy	Output	Kelvin
LYNX-LG3-WS-12X3NW	20W	140Lm/cW	2800Lm	4000K
	24W	140Lm/cW	3360Lm	
	26W	140Lm/cW	3640Lm	
	30W	140Lm/cW	4200Lm	


Net Weight | 2.8kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office




SILVAIR CASAMBI

Dimensions

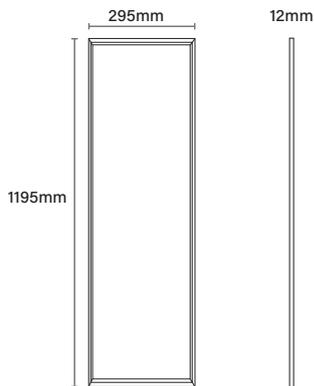

Photometric Data



Energy Efficiency Rating

