



Lynx Advance

Opal Edge-Lit Panel - 4000K
597mmx597mm



Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	412Lm

Lynx Advance Features



IP44 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



150 High LED Efficacy



First Fix Connector

Lynx LG

Part Code	Power	Efficacy	Output	Kelvin
LYNX-AV3-WS-6X6NW	14W	165Lm/cW	2310Lm	4000K
	16W	165Lm/cW	2640Lm	
	18W	165Lm/cW	2970Lm	
	21W	165Lm/cW	3465Lm	
	23W	165Lm/cW	3795Lm	
	25W	165Lm/cW	4125Lm	
	27W	165Lm/cW	4455Lm	
	29W	165Lm/cW	4785Lm	

Net Weight | 2.5kg


Option

Option Code


3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



Dimensions

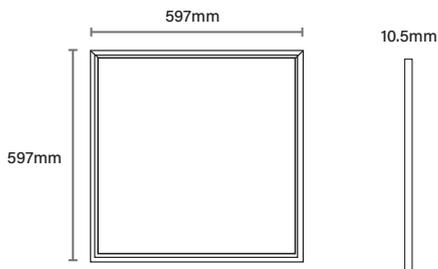

Photometric Data



Energy Efficiency Rating

