



Lynx LG

Low Glare Edge-Lit Panel 4000K
497mmx497mm



Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<17
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Light Guide Plate	PMMA
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	362Lm

Lynx LG Features

- IP44 Ingress Protection
- TP(a) Fire Rating
- Wattage Switchable
- Microprismatic Diffuser Low Glare
- First Fix Connector


Lynx LG				
Part Code	Power	Efficacy	Output	Kelvin
LYNX-LG3-WS-5X5NW	14W	145Lm/cW	2030Lm	4000K
	16W	145Lm/cW	2320Lm	
	18W	145Lm/cW	2610Lm	
	21W	145Lm/cW	3045Lm	
	23W	145Lm/cW	3335Lm	
	25W	145Lm/cW	3625Lm	
	27W	145Lm/cW	3915Lm	
	29W	145Lm/cW	4205Lm	

Net Weight | 2.4kg

Option	Option Code
3 Hour Emergency	+/-EM
Dimming Options	See Below - Contact Office


SILVAIR CASAMBI

Dimensions

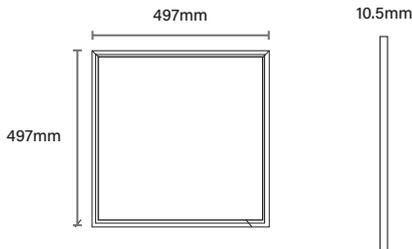

Upgraded size to suit a range of ceiling types

Photometric Data



Energy Efficiency Rating

