



# Lynx LG

Low Glare Edge-Lit Panel - 4000K  
597mmx597mm



## Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<17
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	387Lm

## Lynx LG Features



IP44 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



Microprismatic Diffuser Low Glare



First Fix Connector

### Lynx LG


Part Code	Power	Efficacy	Output	Kelvin
LYNX-LG3-WS-6X6NW	14W	155Lm/cW	2170Lm	4000K
	16W	155Lm/cW	2480Lm	
	18W	155Lm/cW	2790Lm	
	21W	155Lm/cW	3255Lm	
	23W	155Lm/cW	3565Lm	
	25W	155Lm/cW	3875Lm	
	27W	155Lm/cW	4185Lm	
	29W	155Lm/cW	4495Lm	

Net Weight | 2.6kg


Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



## Dimensions

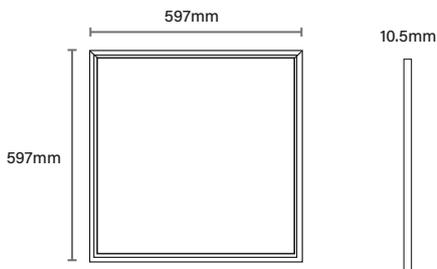

## Photometric Data



## Energy Efficiency Rating

