



# Lynx LG

Low Glare Edge-Lit Panel - Tri-Colour  
597mmx597mm



## Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<17
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	375Lm

## Lynx LG Features



IP44 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



Microprismatic Diffuser Low Glare



First Fix Connector

### Lynx LG

Part Code	Power	Efficacy	Output	Kelvin
LYNX-LG3-WS-6X6TC	14W	150Lm/cW	2100Lm	Tri-Colour: 3000K, 4000K & 6000K
	16W	150Lm/cW	2400Lm	
	18W	150Lm/cW	2700Lm	
	21W	150Lm/cW	3150Lm	
	23W	150Lm/cW	3450Lm	
	25W	150Lm/cW	3750Lm	
	27W	150Lm/cW	4050Lm	
	29W	150Lm/cW	4350Lm	


Net Weight | 2.6kg

Option	Option Code
3 Hour Emergency	+/EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

## Dimensions

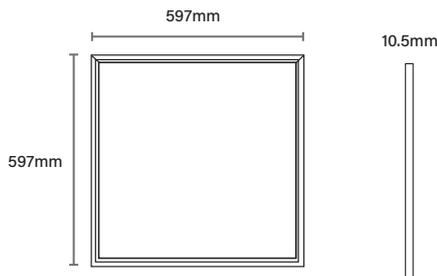

## Photometric Data

