

SPECIFICATION




MediMod

Clean Room Panel - 4000K
595mmx595mm

Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Tempered Glass & Microprismatic Foil
• Beam Spread	110°
• CRI	>80
• Typical UGR	<19
• Operating Temp.	-20°C to +45°C
• Materials	Aluminium & Tempered Glass
• IP Rating	IP65
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours
• Emergency Output	337Lm

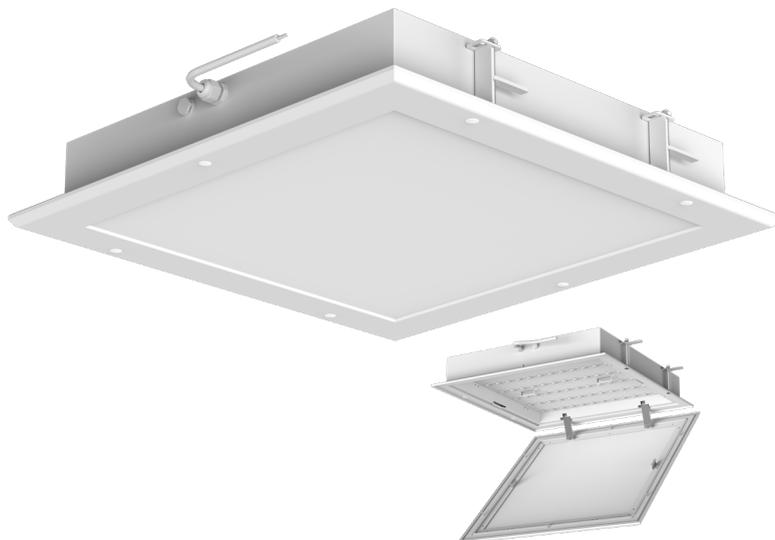

MediMod Features

- IP65 Ingress Protection**
- All Ceiling Types**
- Wattage Switchable**
- Tempered Glass (Chemical Protection)**
- Class 1-9 Cleanroom**

MediMod

Part Code	Power	Efficacy	Output	Kelvin
MM-WS-6X6NW/LG/PCG	17W	135Lm/cW	2295Lm	4000K
	19W	135Lm/cW	2565Lm	
	21W	135Lm/cW	2835Lm	
	23W	135Lm/cW	3105Lm	
	25W	135Lm/cW	3375Lm	
	27W	135Lm/cW	3645Lm	
	29W	135Lm/cW	3915Lm	
	32W	135Lm/cW	4320Lm	
	34W	135Lm/cW	4590Lm	
	36W	135Lm/cW	4860Lm	
	38W	135Lm/cW	5130Lm	


Net Weight | 8.1kg

Option	Option Code
3 Hour Emergency	+/EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

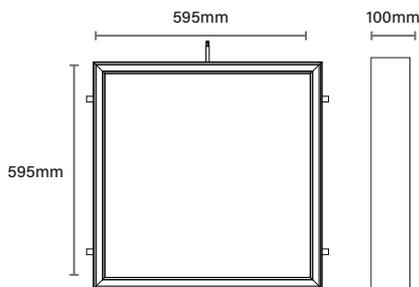

Photometric Data

