

PERFORMANCE



Orion

High-Efficacy Backlit Panel - 4000K
1195mmx295mm



Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP44
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	437Lm

Orion Features



IP44 Ingress Protection



TP(a) Fire Rating



High LED Efficacy



Aluminium Housing



First Fix Connector

Orion

Part Code	Power	Efficacy	Output	Kelvin
ORN2-BL-WS-12X3NW	13W	175Lm/cW	2275Lm	4000K
	15W	175Lm/cW	2625Lm	
	17W	175Lm/cW	2975Lm	
	19W	175Lm/cW	3325Lm	
	21W	175Lm/cW	3675Lm	
	23W	175Lm/cW	4025Lm	
	25W	175Lm/cW	4375Lm	
	27W	175Lm/cW	4725Lm	

Net Weight | 2.5kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office




Switch Dim

Phase Dim

SILVAIR CASAMBI

Dimensions

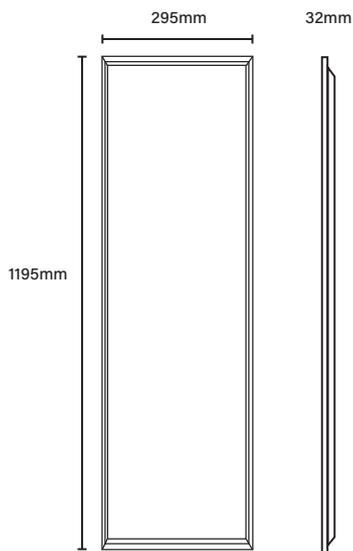

Photometric Data

