

PERFORMANCE



Orion

High-Efficacy Backlit Panel - 4000K
1195mmx595mm

Technical

| | |
|--------------------|----------------------------------|
| • Input Voltage | AC 200-240V |
| • Diffuser Type | Opal |
| • Beam Spread | 110° |
| • CRI | >85 |
| • Power Factor | >0.95 |
| • Typical UGR | <19 |
| • Materials | Aluminium |
| • Operating Temp. | -20 to +50°C |
| • IP Rating | IP44 |
| • Fire Rating | TP(a) |
| • Dimmable | On Request |
| • Lifetime | 50,000 hours, L90-B10 (Ta 25 °C) |
| • Emergency Output | 437Lm |



Orion Features



IP44 Ingress Protection



TP(a) Fire Rating



175 High LED Efficacy



Aluminium Housing



First Fix Connector

Orion 1195mm x 595mm

| Part Code | Power | Efficacy | Output | Kelvin |
|-------------------|-------|----------|--------|--------|
| ORN2-BL-WS-12X6NW | 33W | 175Lm/cW | 5775Lm | 4000K |
| | 38W | 175Lm/cW | 6650Lm | |
| | 41W | 175Lm/cW | 7175Lm | |
| | 44W | 175Lm/cW | 7700Lm | |
| | 47W | 175Lm/cW | 8225Lm | |
| | 50W | 175Lm/cW | 8750Lm | |
| | 53W | 175Lm/cW | 9275Lm | |
| | 56W | 175Lm/cW | 9800Lm | |

Net Weight | 4.8kg

Option | Option Code

| | |
|------------------|----------------------------|
| 3 Hour Emergency | +/EM |
| Dimming Options | See Below - Contact Office |




Switch Dim


Phase Dim

SILVAIR CASAMBI

Dimensions

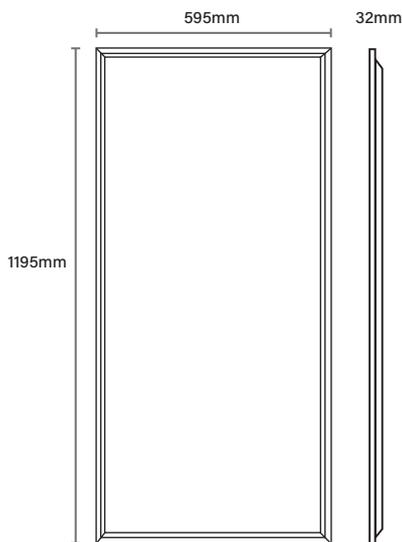

Photometric Data



Opal Diffuser