



Orion

IP65 Edge-Lit Panel - 4000K
595mmx595mm



Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	110°
• CRI	>85
• Power Factor	>0.9
• Typical UGR	<19
• Operating Temp.	-20 to +50°C
• Materials	Aluminium
• IP Rating	IP65
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	337Lm

Orion Edge-Lit Panel Features



IP65 Ingress Protection



TP(a) Fire Rating



Easy-Clean Diffuser



Prismatic Low Glare



First Fix Connector

Orion				
Part Code	Power	Efficacy	Output	Kelvin
ORN2-WS-6X6NW-65-FB/LG	14W	135Lm/cW	1890Lm	Tri-Colour: 4000K
	16W	135Lm/cW	2160Lm	
	18W	135Lm/cW	2430Lm	
	21W	135Lm/cW	2835Lm	
	23W	135Lm/cW	3105Lm	
	25W	135Lm/cW	3375Lm	
	27W	135Lm/cW	3645Lm	
	29W	135Lm/cW	3915Lm	


Net Weight | 4.38kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

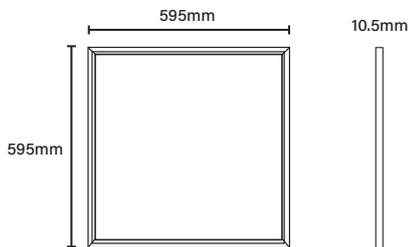

Photometric Data

