

ESSENTIAL




# ON-X Echo

TP(a) Backlit Panel - 4000K

595mmx595mm - With Integral Microwave Sensor

## Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>80
• Power Factor	>0.9
• Typical UGR	<19
• Materials	Aluminium
• Operating Temp.	0 to +40°C
• IP Rating	IP20
• Fire Rating	TP(a)
• Emergency Output	300Lm

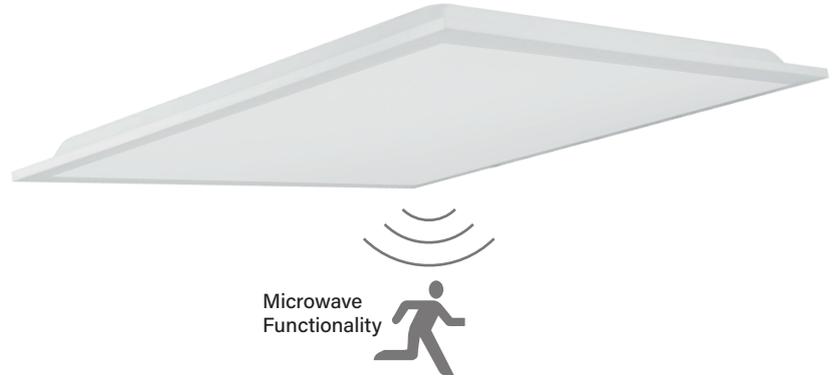

## ON-X Echo Features



IP20 Ingress Protection



TP(a) Fire Rating



Wattage Switchable



Integral Microwave Sensor



3 Pin Push Connector As Standard

### ON-X Echo

Part Code	Power	Efficacy	Output	Kelvin
OX-ECHO-WS-6X6TC	20W	120Lm/cW	2400Lm	Tri-Colour: 3000K, 4000K & 5000K
	22W	120Lm/cW	2640Lm	
	24W	120Lm/cW	2880Lm	
	26W	120Lm/cW	3120Lm	
	28W	120Lm/cW	3360Lm	
	30W	120Lm/cW	3600Lm	

Option	Option Code
3 Hour Emergency	+ /EM

Net Weight | 2.72kg


## Accessories

### Remote Available


Part Code: OX-ECHO-REMOTE



## Dimensions

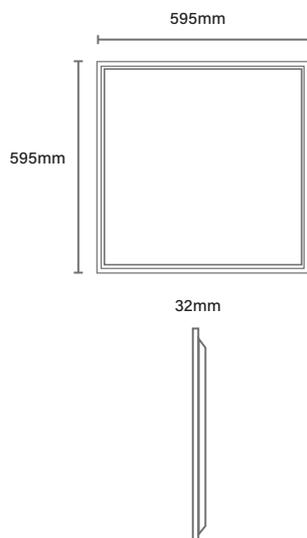

## Photometric Data



## Sensor Information

- Absence/presence & photocell for basic lux sensitivity and natural light override.
- 0%/20%/30%/50% step dim function.
- Standby dimming option/corridor function.
- Max height 6m.