

ESSENTIAL



# ON-X RGBW

TP(a) Backlit Panel

595mmx595mm - With Colour Control/Syncing

### Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>80
• Power Factor	>0.9
• Typical UGR	<19
• Materials	Aluminium
• Operating Temp.	-20 to +40°C
• IP Rating	IP40
• Fire Rating	TP(a)
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	300Lm



### ON-X RGBW Features



IP40 Ingress Protection



TP(a) Fire Rating



Tuya App Compatible



Tunable (RGBW 3000K-6500K)




3 Pin Push Connector As Standard

### ON-X RGBW

Part Code	Power	Efficacy	Output	Kelvin
OX-TPA-40-6X6RGBW	40W	120Lm/cW	4800Lm	Red/Green/Blue/White

Net Weight | 1.56kg

Option	Option Code
3 Hour Emergency	+ /EM
Remote	OX-RGBW-REMOTE



Red/Green/Blue/White  
(3000K/4000K/5000K/6500K)  
Controlled By Remote/App  
(Ordered separately)



Tuya App Control


- White/Colour Tune
- Scene Creation
- Music Syncing
- Timer setting



Remote (See code below)

- 30m Remote Detection Range
- Group Control
- On/Off/Dimming
- CCT & Colour Adjustable
- 4 Scenes

### Dimensions

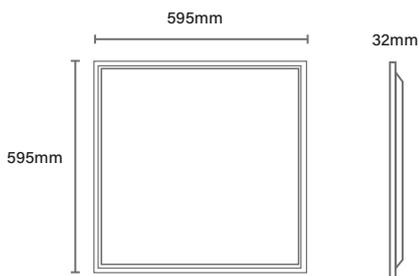

### Photometric Data

